




LIGHT ARM



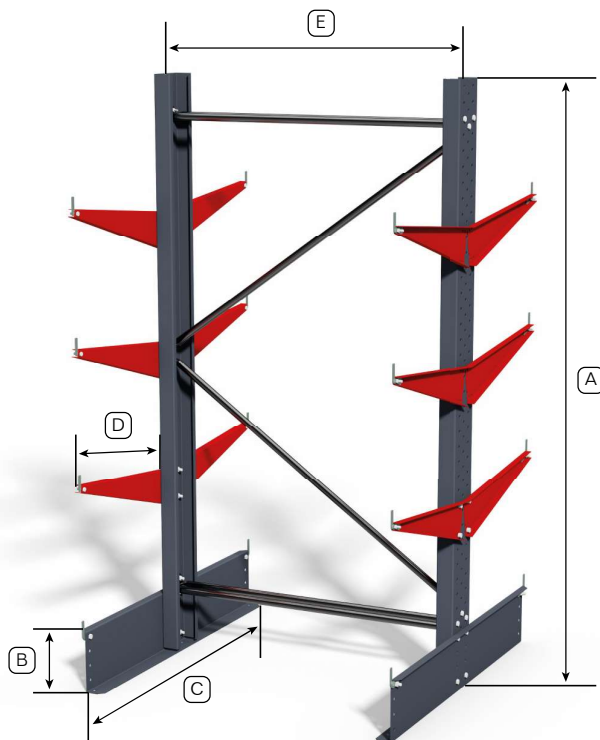

TECHNICAL DETAILS	LIGHT ARM
A Upright, height	2000, 2500 mm
Upright, width & depth	60 x 150 mm
B Foot, height	200 mm
C Double foot, length	1150 mm
Single foot, length	700 mm
D Arm, length	500 mm
Arm movable	50 mm
E Section, length	800, 1100, 1250, 1500 mm
Arm stop, height	45 mm
Max load per arm	150 kg
Max load per upright and side	750 kg

EAB Warehouse equipment: Pallet racking, Drive-in racking, Radioshuttle™, Live storage racking, Drawer unit, Cantilever racking, Timber racking, Vertical racking, Modular shelving, Barrier system and Plastic bins.



SE-333 33 SMÅLANDSSTENAR
TEL +46 371 340 00 www.eab.info

Facts

Safety requirements

EAB's cantilever racking meet all safety requirements in the European FEM Code 10.2.09 which includes instructions for choice of materials, dimensioning, testing, assembly and marking.

Finish

EAB's cantilever racking are lacquered using a heavy-duty powder coating. Standard colors: grey uprights, orange arms.

Delivery

The racks are supplied complete with uprights, arms, brace sections, screws and nuts. EAB's cantilever racking are easy to assemble with the help of the accompanying assembly instructions. All deliveries include a load sign that should be set up where it is clearly visible.



LOG+PLUS

- + Wide range of Standard products
- + Five year guarantee
- + Concept, project management, construction and assembly
- + Tried-and-tested products
- + One project leader = a single contact person throughout the project
- + Production and product development at the same site
- + Extensive experience and solid know-how in steel structures (valuable know-how gained in many warehouse equipping projects)
- + Everything in good time. We ask any questions that arise before making our offer to avoid unnecessary extra costs
- + Our own testing department
- + A long-term approach to business and customer relationships