



Low profile platform trucks

- Powerful push handle and foot operated hydraulics
- Very low overall height for easy pallet pick-up and platform loading
- Separate, quick fit platform included with delivery

material: polyurethane. Wheel Ø: 150 mm. Scissor mechanism colour: signal blue RAL 5005. Platform width: 540 mm. Platform length: 1150 mm. Feature: mobile / manual.

Lifting range: 90 – 830 mm. Fork length: 1150 mm. Fork width: 540 mm. Platform finish: powder coated. Platform colour: pure orange RAL 2004. Push handle version: rigid. Lift drive: foot operated hydraulics. Wheel fittings: 2 steering wheels with double stops, 2 fork rollers. Wheel

Pick up loads on a pallet or platform and transport in lifted position.


Max. load	kg	500	1000
Overall length	mm	1550	1640
Overall width	mm	540	695
Pedal strokes to max. lift	pcs.	45	75
Weight	kg	122	150
Fittings		push handle	push handle drawbar
	Ref.	►519 992 3H	►519 993 3H
	£	1180.00	1320.00

Pallet stackers

- For lifting pallets and mesh pallets
- Solid, hardwearing precision steel profile mast
- Also suitable for mesh pallets

Max. load: 800 kg. Lifting range: 88 – 920 mm. Lift drive: manual hydraulics. Fork length: 1220 mm. Fork width: 150 mm. Distance across forks: 540 mm. Length: 1740 mm. Width: 785 mm. Height: 1320 mm. Lift

per pump stroke: 18.5 mm. Steering wheel material: polyurethane. Steering wheel diameter: 200 mm. Steering wheel width: 50 mm. Fork roller material: polyurethane. Fork roller version: single. Fork roller diameter: 80 mm. Fork roller width: 70 mm. Load centre: 600 mm. Turning radius: 1600 mm. Feature: manual / mobile.

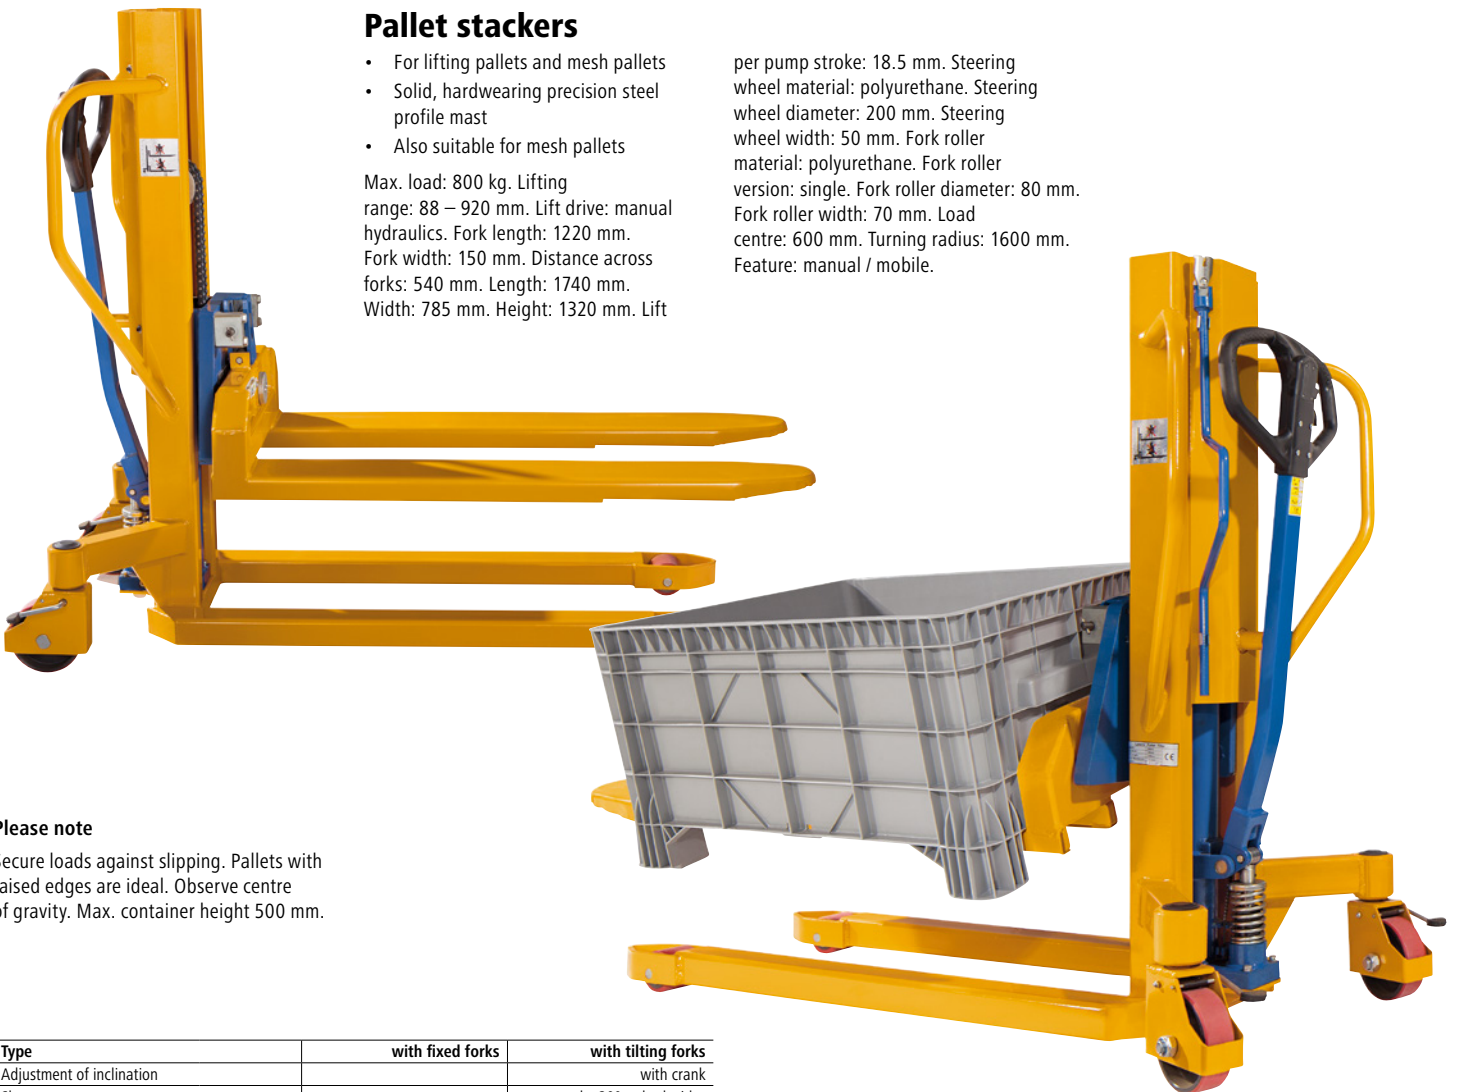

Please note

Secure loads against slipping. Pallets with raised edges are ideal. Observe centre of gravity. Max. container height 500 mm.

Type		with fixed forks	with tilting forks
Adjustment of inclination			with crank
Slope			by 20° to both sides
	Ref.	►968 795 3H	►968 796 3H
	£	1580.00	1580.00