

## Static compact lift tables

- Manufactured in Europe
- Scissors made of stiff rectangular tubing
- Tested in multiple shift operations

Platform design: closed. Operating voltage: 400 V 3-phase AC. Control voltage: 24 V. Lift drive: electro-hydraulic. Platform colour: signal blue RAL 5005. Platform finish: powder coated. Scissor mechanism colour: signal orange RAL 2010. Finish: powder coated. Frame colour: signal blue RAL 5005. Fittings: with hand operated control unit. Lifting capacity at full load in multiple-shift operations: max. 10 cycles per hour. Feature: stationary / electro-hydraulic.




230 V model on request.


Accessories for static compact lift tables on request.

Lifting capacity at full load: max. 10 cycles per hour in 2 shift operation (= max. 10000 cycles per year).


Max. load	kg	500	1000	1000	1000	1000	1000	1500	2000	2000	2000	2000	3000
Lifting range	mm	160 – 760	160 – 760	320 – 1920	180 – 1000	180 – 1000	200 – 1500	230 – 1330	200 – 1020	200 – 1020	220 – 1220	250 – 1750	250 – 1350
Platform length	mm	900	900	1300	1300	1300	2000	1700	1300	1300	1500	2200	1700
Platform width	mm	700	700	800	800	1000	800	1000	1000	800	1000	1200	900
Power	kW	0.37	0.37	1,5	0.75	0.75	1,5	1.5	1.5	1.5	1.5	1.5	1.5
Lift	mm	600	600		820	820		1100	820	820	1000	1500	1100
Ref.		▶969 081 3H	969 082 3H	539 608 3H	▶804 191 3H	▶760 557 3H	539 609 3H	986 363 3H	▶927 358 3H	▶969 083 3H	986 362 3H	986 366 3H	986 365 3H
£		2800.00	3025.00	4900.00	3175.00	3350.00	4900.00	4600.00	3850.00	3625.00	4550.00	7400.00	6050.00

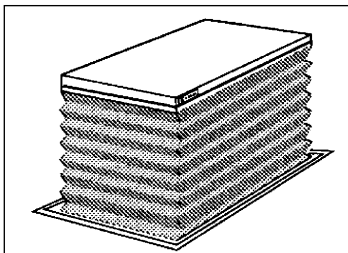


On request: safety bellows – tabletop enlargement required

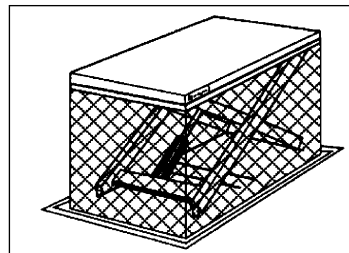


On request: safety net – tabletop enlargement required




On request: pallet truck attachment – overall height + min. 135 mm

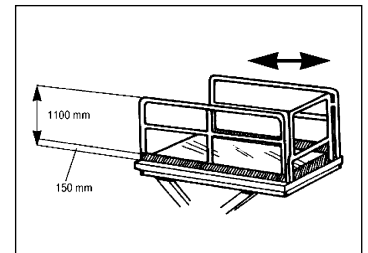


On request: railing – with hinge at the side

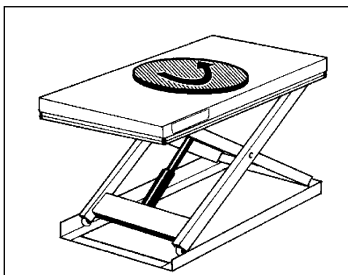


On request: turntable – increases the overall height by 55 – 61 mm

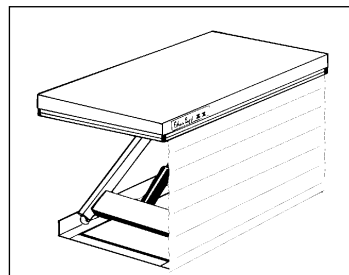

On request: safety curtain – tabletop enlargement required

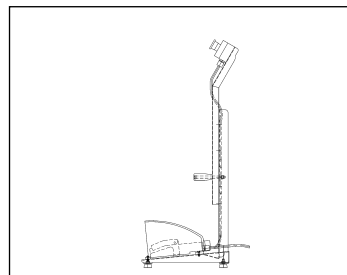

On request: pedal operated control unit – complete with up/down and emergency stop

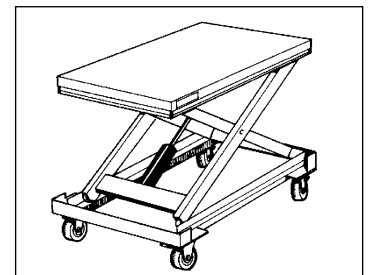

On request: mobile base height – overall height + min. 240 mm