

1–5 | Mobile aluminium bridge plates

- Stop angle to protect against slippage
- Platform with anti-slip surface
- Two hand holes for carrying

Width: 1250 mm. Finish: closed, chequer plate. Fittings: one-part / stop edge / handle.
Feature: anti-slip. Usable width: 1250 mm. Material: aluminium. Application: loading aid.

Other sizes and load capacities on request.

		1	2	3	4	5
Rail length	mm	750	1000	1200	1500	1800
Height difference	mm	100	125	150	190	225
Max. load						
600 kg	Ref.	555 592 6F	555 606 6F	555 614 6F	400 696 6F	400 700 6F
	£	349.00	439.00	519.00	749.00	859.00
1200 kg	Ref.	555 622 6F	555 630 6F	555 649 6F	400 718 6F	400 726 6F
	£	449.00	519.00	699.00	869.00	1025.00




6–8 | Aluminium loading rails

- Light design, low weight
- Non-slip surface
- Industrial quality – manufactured in Europe

Width: 234 mm. Finish: closed. Fittings: one-part / loading ramp tongue / edge.
Feature: anti-slip. Usable width: 150 mm. Therapeutic aid number for health insurer: 22.50.01.0030. Material: aluminium. Application: loading aid.

		6	7	8
Rail length	mm	2000	2500	3000
Max. load per pair	kg	500	400	350
Max. load	kg	250	200	175
Weight per item	kg	8	10	12
	Ref.	644 170 6F	644 030 6F	643 980 6F
	£ / pair	295.00	319.00	379.00

Other dimensions and load capacities on request. Also available as a folding model. Loading rail inclination may not exceed 30%.

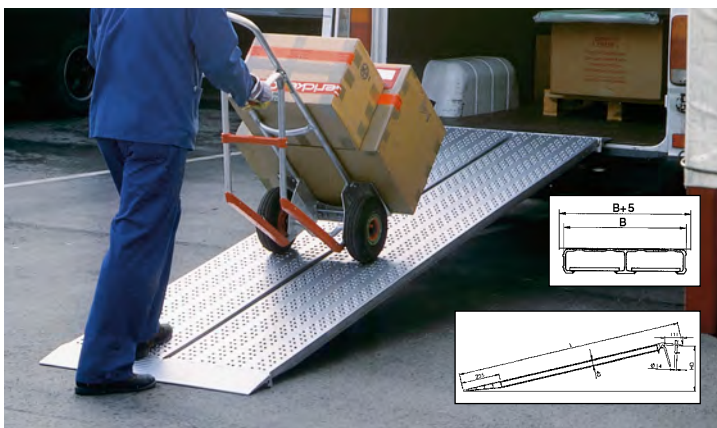

9–21 | Aluminium loading ramps

- Non-slip surface
- Slip-off prevented with safety bolts and safety tag
- Industrial quality – manufactured in Europe

Finish: open, punched. Fittings: one-part / stop edge / loading ramp tongue / bolt retainer.
Feature: anti-slip. Material: aluminium. Application: loading aid.

Other sizes and load capacities on request. Loading rail inclination may not exceed 30%.

		9	10	11	12	13	14	15	16	17	18	19	20	21
Rail length	mm	1500	1500	1500	1500	2000	2000	2000	2000	2500	2500	2500	2500	3300
Width	mm	200	300	400	600	200	300	400	600	200	300	300	600	400
Max. load	kg	435	665	835	1230	275	450	530	870	200	325	745	1110	750
Height difference	mm	230 – 400	220 – 400	230 – 400	230 – 400	310 – 540	310 – 540	310 – 540	310 – 540	390 – 690	390 – 690	390 – 690	390 – 690	510 – 980
Weight per item	kg	7	10	13	19	8	12	16	23	9	14	21	38	31
Usable width	mm	200	300	400	600	200	300	400	600	200	300	300	600	400
	Ref.	734 514 6F	734 517 6F	849 138 6F	918 482 6F	734 515 6F	734 518 6F	918 490 6F	919 446 6F	734 516 6F	734 520 6F	252 123 6F	252 131 6F	555 665 6F
	£	159.00	265.00	295.00	359.00	169.00	275.00	359.00	399.00	189.00	439.00	529.00	759.00	779.00