



Hard wearing



Non-marking



Hard wearing

Swivel bearing with double ball race, swivel bearing protection, thread guard.

TENTE

TRANSPORT




Nylon wheels

- Reduced noise, up to 10 dB quieter than comparable, conventional wheels
- Reduces noise from transport equipment
- Cushioning component inside the wheel bearing with CELLASTO® shock absorber


plate dimensions: 105 x 85 mm. Screw hole spacing: 80 / 77 x 60 mm. Housing surface: galvanised and chrome-plated. Feature: low noise / non-marking / low wear / low rolling resistance / low swivel resistance.

Wheel material: polyamide with damping element. Material of rim: nylon. Housing material: steel. Max. load at 4 km/h: 250 kg. Type of mounting: with top plate. Wheel bearing: precision ball bearing. Temperature resistance: -40 °C to +80 °C. Screw hole diameter: 9 mm. Hub length: 45 mm. Hub bore: 8 mm. Fixed castor plate dimensions: 105 x 85 mm. Swivel castor

Wheel structure



Wheel Ø	mm	100	125
Wheel width	mm	36	40
Overall height	mm	128	155
Structure			
fixed castor	Ref.	►969 148 3H	►969 155 3H
	£	19.75	26.00
swivel castor	Ref.	►969 146 3H	►969 153 3H
	£	22.00	29.50
swivel castor with double stop	Ref.	►969 147 3H	►969 154 3H
	£	30.50	34.00
Accessories			
Wheels	Ref.	►969 149 3H	►969 156 3H
	£	17.50	18.50
2 swivel castors, 2 swivel castors with double stops	Ref.	►969 151 3H	►969 157 3H
	£	92.00	105.00
2 swivel castors with double stops, 2 fixed castors	Ref.	►969 152 3H	►969 158 3H
	£	89.00	103.00

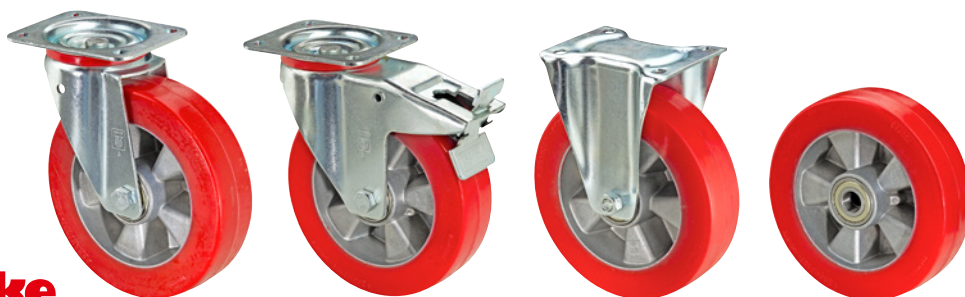

Cut resistant



Hard wearing



Non-marking

Swivel bearing with double ball race, swivel bearing protection.

Polyurethane tyres

- On aluminium rims
- Non-marking due to special composition
- Hardwearing and cut resistant

Wheel material: polyurethane. Material of rim: aluminium. Housing material: steel. Type of mounting: with top plate. Wheel bearing: ball bearing. Temperature resistance: -5 °C to +80 °C. Housing surface: zinc plated. Shore hardness: 75 A. Feature: does not damage floors / low wear / low rolling resistance / low swivel resistance / non-marking.

Wheel Ø	mm	100	100	125	125	160	200
Max. load at 4 km/h	kg	200	250	200	280	300	300
Wheel width	mm	40	40	40	40	50	50
Overall height	mm	125	128	155	155	190	235
Screw hole diameter	mm	9	11	9	11	11	11
Hub length	mm	40	40	50	50	60	60
Hub bore	mm	12	12	20	20	20	20
Fixed castor plate dimensions	mm	102 x 87	135 x 114	102 x 87	135 x 114	135 x 114	135 x 114
Swivel castor plate dimensions	mm	105 x 80	135 x 110	105 x 80	135 x 110	135 x 110	135 x 110
Screw hole spacing	mm	80 x 60 - 76	105 x 75 - 80	80 x 60 - 76	105 x 75 - 80	105 x 75 - 80	105 x 75 - 80
Structure							
fixed castor	Ref.	►760 535 3H	►760 537 3H	►760 538 3H	►760 539 3H	►760 540 3H	►760 541 3H
	£	37.00	46.00	68.00	73.00	73.00	88.00
swivel castor	Ref.	►760 522 3H	►760 523 3H	►760 524 3H	►760 525 3H	►760 526 3H	►760 527 3H
	£	39.50	47.00	68.00	79.00	73.00	93.00
swivel castor with double stop	Ref.	►760 529 3H	►760 530 3H	►760 531 3H	►760 532 3H	►760 533 3H	►760 534 3H
	£	49.00	56.00	79.00	88.00	90.00	103.00
Accessories							
Wheels	Ref.	►760 542 3H	►760 542 3H	►760 545 3H	►760 545 3H	►760 547 3H	►760 548 3H
	£	34.00	34.00	57.00	57.00	57.00	79.00

Free delivery to UK mainland for over 80,000 products.

UK
Ireland

01442 238 000
1 800 677 300

KAISER+KRAFT