

Polyurethane tyres

- On aluminium rims
- Extremely durable for high performance
- Low rolling resistance

Wheel material: polyurethane. Material of rim: aluminium. Housing material: steel. Type of mounting: with top plate. Wheel bearing: ball bearing. Temperature resistance: -5 °C to +80 °C. Housing surface: zinc plated. Shore hardness: 92 ± 3 A. Feature: does not damage floors / low wear / low rolling resistance / low swivel resistance / non-marking.




High load capacity



Hard wearing



Non-marking

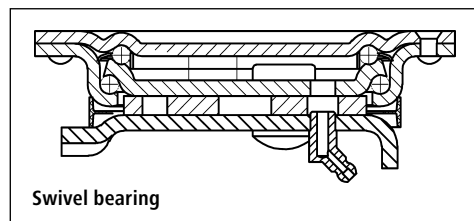

Swivel bearing

Reinforced housing. Swivel bearing without central bolt with hardened, double ball race, swivel bearing protection.

Wheel Ø	mm	100	125	160	200
Max. load at 4 km/h	kg	280	350	500	700
Wheel width	mm	40	40	50	50
Overall height	mm	130	178	215	245
Screw hole diameter	mm	9	11	11	11
Hub length	mm	41	50	60	60
Hub bore	mm	12	20	20	20
Fixed castor plate dimensions	mm	105 x 80	135 x 110	135 x 110	135 x 110
Swivel castor plate dimensions	mm	105 x 80	135 x 110	135 x 110	135 x 110
Screw hole spacing	mm	80 x 60	105 x 80	105 x 80	105 x 80
Structure					
fixed castor	Ref.	►969 308 3H	►969 313 3H	►969 317 3H	►969 322 3H
	£	46.00	69.00	80.00	94.00
swivel castor	Ref.	►969 306 3H	►969 310 3H	►969 315 3H	►969 319 3H
	£	69.00	89.00	100.00	107.00
swivel castor with double stop	Ref.	►969 307 3H	►969 312 3H	►969 316 3H	►969 321 3H
	£	80.00	100.00	129.00	151.00
Accessories					
Wheels	Ref.	►969 309 3H	►969 314 3H	►969 318 3H	►969 323 3H
	£	33.00	58.00	58.00	75.00

NEW



Hard wearing



High load capacity

Swivel bearing with double ball race, swivel bearing protection.



Nylon wheels

- High maximum load
- Extremely durable
- Reinforced housing

Wheel material: nylon. Material of rim: nylon. Housing material: steel. Type of mounting: with top plate. Temperature resistance: -40 °C to +90 °C. Housing surface: galvanised and chrome-plated.



Wheel Ø	mm	100	100	125	150	200	100	100	125	150	200
Max. load at 4 km/h	kg	450	450	550	850	900	500	500	600	900	900
Wheel width	mm	35	35	45	50	50	35	35	45	50	50
Overall height	mm	140	140	170	200	245	140	140	170	200	245
Wheel bearing		plain bearing	plain bearing	plain bearing	plain bearing	plain bearing	ball bearing	ball bearing	ball bearing	ball bearing	ball bearing
Screw hole diameter	mm	9	9	11	11	11	9	9	11	11	11
Hub length	mm	40	40	50	60	60	40	40	50	60	60
Fixed castor plate dimensions	mm	100 x 85	100 x 85	135 x 114	135 x 114	135 x 114	100 x 85	100 x 85	135 x 114	135 x 114	135 x 114
Swivel castor plate dimensions	mm	100 x 85	100 x 85	135 x 110	135 x 110	135 x 110	100 x 85	100 x 85	135 x 110	135 x 110	135 x 110
Screw hole spacing	mm	80 / 75 x 60 / 55	80 / 76 x 60	105 x 75 / 80	105 x 75 / 80	105 x 75 / 80	80 / 75 x 60 / 55	80 / 76 x 60	105 x 75 / 80	105 x 75 / 80	105 x 75 / 80
Structure											
fixed castor	Ref.		►569 652 3H	►569 658 3H	►569 664 3H	►569 670 3H		►569 649 3H	►569 655 3H	►569 661 3H	►569 667 3H
	£		22.50	38.50	40.00	44.00		37.00	41.00	45.00	45.00
swivel castor	Ref.	►569 650 3H		►569 656 3H	►569 662 3H	►569 668 3H	►569 647 3H		►569 653 3H	►569 659 3H	►569 665 3H
	£	39.50		47.00	50.00	50.00	66.00		50.00	52.00	56.00
swivel castor with double stop	Ref.	►569 651 3H		►569 657 3H	►569 663 3H	►569 669 3H	►569 648 3H		►569 654 3H	►569 660 3H	►569 666 3H
	£	47.00		52.00	55.00	57.00	52.00		55.00	60.00	66.00
Accessories											
Nylon wheels	Ref.	►645 389 3H	►645 389 3H	►193 100 3H	►193 127 3H	►193 143 3H	►892 386 3H	►892 386 3H	►423 240 3H	►423 241 3H	►423 263 3H
	£	20.00	20.00	30.50	28.50	34.00	23.00	23.00	30.50	38.50	44.00