



High load capacity



Hard wearing



Hard wearing




Cut resistant



More products online!

proroll

TRANSPORT

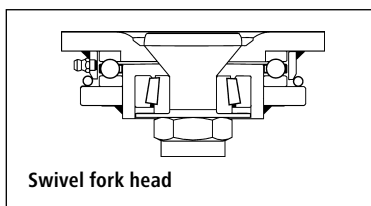

Polyurethane tyres

- Permanently fixed on precision, machine turned cast rims
- Easy rolling, quiet
- Hardwearing and cut resistant

Wheel material: polyurethane.

Material of rim: cast iron. Housing material: steel. Type of mounting: with top plate. Wheel width: 50 mm. Wheel bearing: ball bearing. Temperature resistance: -20 °C to +85 °C. Screw hole diameter: 10 mm. Hub length: 60 mm. Hub bore: 20 mm. Fixed castor plate dimensions: 138 x 110 mm. Swivel castor plate dimensions: 138 x 110 mm. Screw hole spacing: 105 x 78 – 80 mm. Housing surface: zinc plated. Shore hardness: 93 ± 3 A. Feature: low rolling resistance.

Heavy, welded sheet steel housing, zinc plated.

Swivel bearing with sealed fork head and combined deep groove ball bearings and tapered roller bearings, with lubrication nipple.

Ball bearings with lubrication nipple.

On request

Swivel castors (with and without double stops) with four-way directional stops, can be fitted at a later stage. This converts swivel castors into fixed castors.

Wheel Ø	mm	125	200	250
Max. load at 4 km/h	kg	550	1000	1200
Overall height	mm	175	250	300
Structure				
fixed castor	Ref.	►969 111 3H	►969 115 3H	►969 120 3H
	£	75.00	89.00	115.00
swivel castor	Ref.	►969 108 3H	►969 113 3H	►969 118 3H
	£	107.00	137.00	161.00
swivel castor with double stop	Ref.	►969 110 3H	►969 114 3H	►969 119 3H
	£	151.00	161.00	191.00
Accessories				
Wheels	Ref.	►969 112 3H	►969 116 3H	►969 121 3H
	£	45.00	75.00	89.00

Polyurethane tyres

- Hardness 93 ± 3 Shore A
- Permanently fixed on precision, machine turned cast rims
- Ball bearings with lubrication nipple

Wheel material: polyurethane. Material of rim: cast iron. Housing material: steel. Type of mounting: with top plate. Wheel bearing: ball bearing. Temperature resistance: -20 °C to +85 °C. Screw hole diameter: 14.5 mm. Fixed castor plate dimensions: 175 x 140 mm. Swivel castor plate dimensions: 175 x 140 mm. Screw hole spacing: 140 x 105 mm. Housing surface: zinc plated. Shore hardness: 93 ± 3 A. Feature: low rolling resistance.

Heavy, welded sheet steel housing, zinc plated.

Swivel castors with sealed fork head and combined deep groove ball bearings and tapered roller bearings, with lubrication nipple.

On request

Swivel castors (with and without double stops) with four-way directional stops, can be fitted at a later stage. This converts swivel castors into fixed castors.

Wheel Ø	mm	150	200	250	300
Max. load at 4 km/h	kg	800	1000	1800	2000
Wheel width	mm	50	50	75	75
Overall height	mm	212	264	314	365
Hub length	mm	60	60	82	82
Hub bore	mm	20	20	30	30
Structure					
fixed castor	Ref.	►969 124 3H	►969 129 3H	►969 134 3H	►969 138 3H
	£	91.00	105.00	191.00	237.00
swivel castor	Ref.	►969 122 3H	►969 127 3H	►969 131 3H	►969 136 3H
	£	161.00	179.00	253.00	297.00
swivel castor with double stop	Ref.	►969 123 3H	►969 128 3H	►969 132 3H	►969 137 3H
	£	201.00	205.00	281.00	329.00
Accessories					
Wheels	Ref.	►969 126 3H	►969 116 3H	►969 135 3H	►969 139 3H
	£	48.00	75.00	137.00	161.00

Free delivery to UK mainland for over 80,000 products.

UK
Ireland

01442 238 000
1 800 677 300

KAISER+KRAFT