

Zinc plated mesh grid shelves, drop-in

- Ends of panel overlap beams for secure placement
- Also provides protection for passageways and aisles
- Supported on longitudinal beams with welded flat iron, 50 x 2 mm

Material: zinc plated.

For beam length: 1825 mm.

For depth: 800 mm. Max. load: 2700 kg.

Ref. 490 825 3H £ 215.00

For depth: 1100 mm. Max. load: 1980 kg.

Ref. 490 829 3H £ 275.00

For beam length: 2700 mm.

For depth: 800 mm. Max. load: 4100 kg.

Ref. 490 827 3H £ 315.00

For depth: 1100 mm. Max. load: 3000 kg.

Ref. 490 831 3H £ 405.00

For beam length: 3600 mm.

For depth: 800 mm. Max. load: 5400 kg.

Ref. 490 828 3H £ 415.00

For depth: 1100 mm. Max. load: 3960 kg.

Ref. 490 832 3H £ 495.00

For beam length: 2225 mm.

For depth: 800 mm. Max. load: 3300 kg.

Ref. 490 826 3H £ 275.00

For depth: 1100 mm. Max. load: 2450 kg.

Ref. 490 830 3H £ 315.00

Zinc plated container supports

- For mesh pallets, Euro pallets etc.
- Suitable for 1 mesh pallet
- Raised edge on the sides and push-through stop


For width: 50 mm. Material: zinc plated.

Width: 1200 mm. For depth: 800 mm.

Ref. 120 245 3H £ /pair 83.00

Width: 800 mm. For depth: 1100 mm.

Ref. 120 242 3H £ /pair 98.00

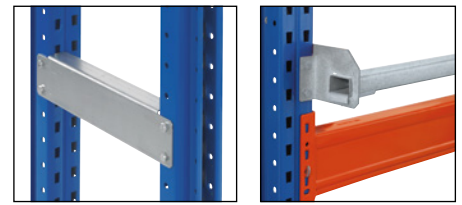

Spacers

- Length 200 mm
- Connect two shelf units positioned back-to-back to form a sturdy double sided shelf unit
- 2 items are required per upright pair (supplied in pairs)

Colour: zinc plated. Material: steel.

Length: 200 mm.

Ref. 120 273 3H £ /pair 22.00

Push-through stop, zinc plated

- Prevents stored items from sliding out unintentionally
- For single and double sided shelf units (for use with spacers)
- Supplied with mounting material

Colour: zinc plated. Material: steel.

Length: 1825 mm.

Ref. 490 813 3H £ 50.00

Length: 2225 mm.

Ref. 490 814 3H £ 59.00

Length: 2700 mm.

Ref. 490 815 3H £ 70.00

Length: 3600 mm.

Ref. 490 816 3H £ 76.00

Zinc plated transverse supports

- For storing pallets in a crosswise manner
- To firmly support the middle runner of pallets in crosswise position
- Smooth version, supplied in pairs

Material: zinc plated.

Length: 800 mm.

Ref. 490 817 3H £ /pair 39.50

Length: 1100 mm.

Ref. 490 818 3H £ /pair 45.00

Crash guards

- Compliant with EN 15635 and BGR 234 guidelines

Colour: black / yellow. Material: steel. Type

of mounting: floor attachment. Panel thickness: 6 mm.

In accordance with EN 15635 and the BGR 234 guidelines, crash guards must be installed in front of uprights at the beginning and end of shelving units located in transport areas.



Shape		L-shaped	L-shaped	L-shaped	U-shaped	U-shaped
Overall width	mm	160	160	180	245	281
Overall height	mm	800	1200	400	400	400
	Ref.	▶171 374 3H	▶171 373 3H	▶171 372 3H	▶171 370 3H	▶179 244 3H
	£	235.00	335.00	52.00	62.00	99.00