



Low profile steel sump trays

- Easily driven over, minimal space required, large trays
- Can be easily accessed and driven over with drum trucks, pallet trucks, forklifts etc. due to particularly low overall height of only 78 mm
- Large footprint – large areas can be covered with only a few trays – and are thus cost effective as well

Test symbol: with general certification from the DIBt (German Institute for Construction Technology) Berlin. Material thickness: 3 mm. Hazard class: for flammable liquids in GHS categories 1 – 3 as well as water hazardous liquids in GHS categories 1 – 4. Max. wheel load: 500 kg.

Height: 78 mm. Material: sheet steel.
Grate: with removable, hot dip galvanised grates. Finish: hot dip galvanised.
Design: can be walked/driven on.
Max. load: 5000 kg/m².

Tray with 242 litre sump capacity is suitable for the storage of 200 litre drums.

Length	mm	1350	1900	2850	2850
Width	mm	1350	1350	1350	1900
Sump capacity	l	82	118	172	242
	Ref.	523 523 3H	523 524 3H	523 525 3H	523 527 3H
	£	495.00	629.00	879.00	1420.00

Ramps

Width: 500 mm. Finish: zinc plated.
Max. wheel load: 500 kg.

Length: 1350 mm.
Ref. 523 528 3H £ 231.00

Connecting rails

Finish: zinc plated. Width: 55 mm.

Length: 1350 mm.
Ref. 523 533 3H £ 38.50

Length: 1900 mm.

Ref. 523 529 3H £ 319.00

Length: 2850 mm.


Ref. 523 530 3H £ 439.00

Length: 1900 mm.

Ref. 523 535 3H £ 44.00

Length: 2850 mm.

Ref. 523 536 3H £ 66.00

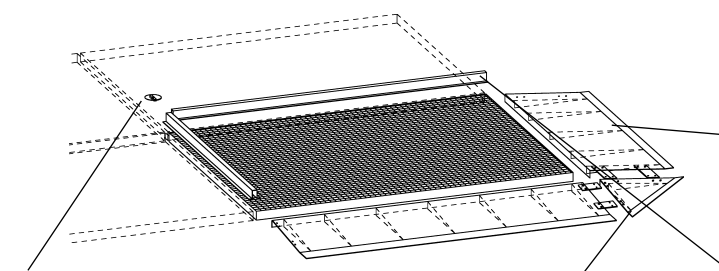

Cross connector

Finish: zinc plated.

Ref. 523 532 3H £ 29.50

Ramped corners

Length: 500 mm. Width: 500 mm.
Finish: zinc plated. Max. wheel load: 500 kg.

Ref. 523 531 3H £ 185.00

Plastic sump trays

- Made of PE – robust, durable, highly resistant to corrosive liquids such as acids, alkaline solutions, oils etc.
- Ideal for lining areas – can be driven on with drum trucks and walked on
- Certified for safe storage and dispensing of water hazardous liquids in GHS categories 1 – 4

Height: 150 mm. Material: polyethylene.
Colour: blue. Design: can be walked/driven on. Max. load: 800 kg/m². Test symbol: with general certification from the DIBt (German Institute for Construction Technology) Berlin. Hazard class: for water hazardous liquids in GHS categories 1 – 4.



Grate		steel	PE	steel	PE	steel	PE	steel	PE
Length	mm	1500	1500	1500	1500	2200	2200	3000	3000
Width	mm	800	800	1500	1500	1500	1500	1500	1500
Sump capacity	l	125	125	220	220	355	355	400	400
	Ref.	523 537 3H	523 538 3H	761 713 3H	761 714 3H	523 539 3H	523 540 3H	761 715 3H	761 716 3H
	£	495.00	495.00	719.00	879.00	879.00	929.00	1400.00	1520.00

Edge fasteners

Ref. 761 719 3H £ 35.00

Cross connectors

Ref. 761 720 3H £ 36.00

Spacer connectors

Ref. 983 684 3H £ 31.50


Connecting elements

Length	mm	720	1420	2120	2920
	Ref.	523 541 3H	761 717 3H	523 543 3H	761 718 3H
	£	33.00	55.00	56.00	88.00

PE loading ramps

Length: 900 mm. Width: 940 mm. Material: polyethylene.
Height: 150 mm.

Ref. 761 721 3H £ 329.00

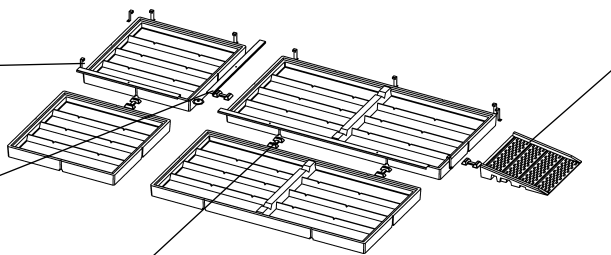

Free delivery to UK mainland for over 80,000 products.

UK
Ireland

01442 238 000
1 800 677 300

KAISER+KRAFT

381

ENVIRONMENT