

Floor and workbench matting

- For aisles, work tables and workshop trolleys
- Easy to cut and lay
- Sold by the metre

Material: natural rubber. Temperature resistance: -20 °C to +80 °C. Colour: black. Max. roll length: 10 m. Type: ribbed. Feature: non-slip. Work area: dry. Surface: closed. Form of delivery: cuts per metre.

Width: 900 mm. Height: 3 mm. Weight: 2.7 kg. Weight: 2.7 kg/m².

Ref. 909 004 3H £/m 29.00

Width: 900 mm. Height: 6 mm. Weight: 6.5 kg. Weight: 6.5 kg/m².

Ref. 909 005 3H £/m 65.00

Width: 1200 mm. Height: 3 mm. Weight: 2.7 kg.

Weight: 2.7 kg/m².

Ref. 909 006 3H £/m 34.50

Width: 1200 mm. Height: 6 mm. Weight: 6.5 kg.

Weight: 6.5 kg/m².


Ref. 909 007 3H £/m 81.00

Products cut to order may exhibit dimensional tolerances of up to ±5% depending on the material.

Products cut to order are produced specifically for you, and can therefore not be returned.



Slip resistant

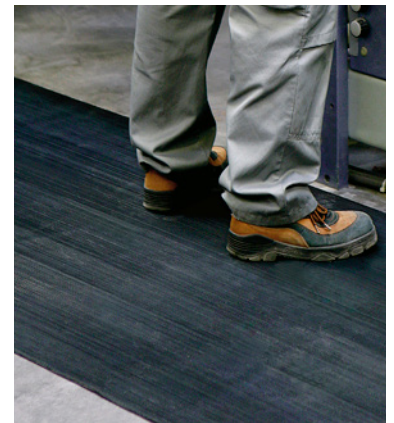

Floor and workbench matting

- As an underlay to protect tools and sensitive equipment
- Resistant to oil, grease and chemicals
- Sold by the metre

Width: 1000 mm. Height: 2 mm. Material: vinyl. Temperature resistance: -20 °C to +60 °C. Type: ribbed. Feature: non-slip / chemical resistant / protects floors / oil resistant. Work area: dry / oily. Surface: closed.

Length	m		10	25
Max. roll length			25	
Weight	kg	2.2	20	44
Weight	kg/m ²	2.2	2.0	1.76
Form of delivery		cuts per metre	10 m roll	25 m roll
Colour	From			
black	1 m	Ref. 743 448 3H £ 44.00		
black	1 pcs.	Ref. 483 521 3H £ 429.00	743 451 3H 1040.00	
light grey	1 m	Ref. 743 449 3H £ 44.00		
light grey	1 pcs.	Ref. 483 522 3H £ 429.00	743 452 3H 1040.00	
red	1 m	Ref. 743 447 3H £ 44.00		
red	1 pcs.	Ref. 483 520 3H £ 429.00	743 450 3H 1040.00	



Chemical resistant



Slip resistant



Industrial matting

- Suitable for areas where large quantities of dirt and chippings are generated
- High degree of slip protection R11/V10 according to GUV-R 181
- Resistant to commonly used chemicals

Height: 15 mm. Material: recycled PVC. Temperature resistance: -5 °C to +60 °C. Weight: 7.2 kg/m². Type: floor tile. Feature: anti-fatigue / chemical resistant / non-slip / oil resistant. Work area: dry / wet / oily. Slat width: 8.6 mm. Surface: open. Custom dimensions possible.

Max. roll length: 30 m. Form of delivery: cuts per metre.

Width: 600 mm. Colour: black. Weight: 4.3 kg.

Ref. 503 114 3H £/m 65.00

Width: 800 mm. Colour: black. Weight: 5.8 kg.

Ref. 503 115 3H £/m 84.00

Width: 1000 mm. Colour: black. Weight: 7.2 kg.

Ref. 503 116 3H £/m 107.00

Width: 1200 mm. Colour: black. Weight: 8.6 kg.

Ref. 503 117 3H £/m 133.00

Length: 10 m. Max. roll length: 10 m. Form of delivery: 10 m roll.

Width: 600 mm. Colour: black. Weight: 43 kg.

Ref. 503 119 3H £ 535.00

Width: 800 mm. Colour: black. Weight: 58 kg.

Ref. 503 120 3H £ 719.00

Width: 1000 mm. Colour: black. Weight: 72 kg.

Ref. 503 121 3H £ 889.00

Width: 1200 mm. Colour: black. Weight: 86 kg.

Ref. 503 122 3H £ 1080.00




Chemical resistant



Slip resistant



Anti-fatigue

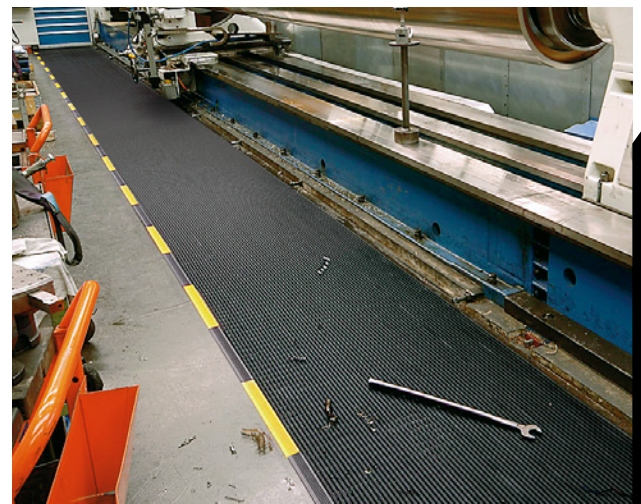

Intermediate widths on request.

Bevelled edge profile

Type: for long side. Colour: black.

Ref. 193 844 3H £/m 15.75

Type: for short side. Colour: black.

Ref. 731 673 3H £/m 13.50

Type: for long side. Colour: yellow/black.

Ref. 731 674 3H £/m 16.75

Type: for short side. Colour: yellow/black.

Ref. 731 675 3H £/m 14.00

Free delivery to UK mainland for over 80,000 products.

UK
Ireland

01442 238 000
1 800 677 300

KAISER+KRAFT

563

WORKSHOP