



Slip resistant



Anti-fatigue




Conductive discharge



Fire retardant



Chemical resistant

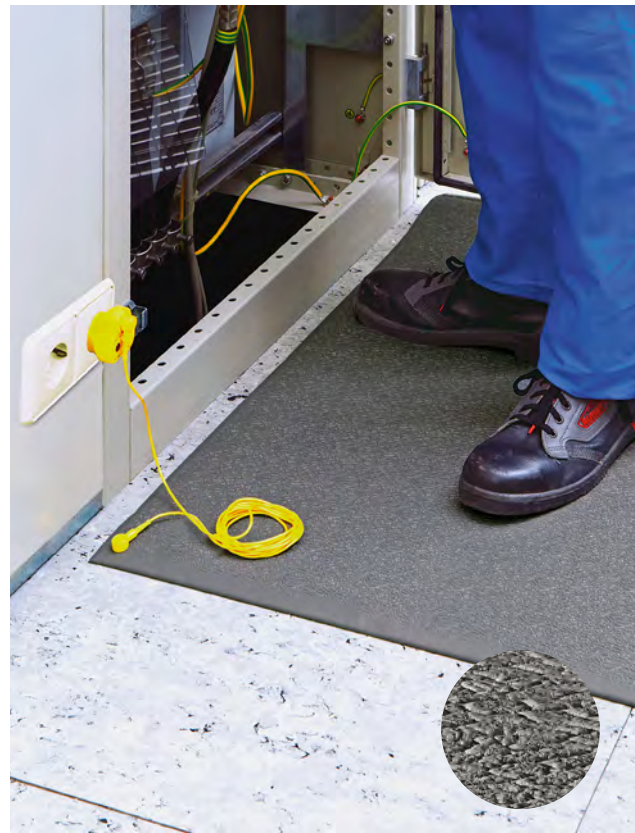

Slip resistant



Anti-fatigue



Conductive discharge

## 1–2 | Conductive workplace matting

- Chemical resistant
- Fire protection class B1 DIN 4102 (flame resistant)
- Conductive (DIN IEC 61340-4-1 ESD)

Height: 14 mm. Material: polyurethane. Temperature resistance:  $-40^{\circ}\text{C}$  to  $+80^{\circ}\text{C}$ . Colour: black. Weight:  $5.2\text{ kg/m}^2$ . Type: B1 (flame resistant) and ESD (conductive). Feature: non-slip / anti-fatigue / chemical resistant / flame retardant / conductive / tapered / ESD version. Work area: wet / dry / oily. Surface: closed. Custom dimensions possible.

1 | Width: 650 mm. Length: 950 mm. Weight: 3.4 kg.

**Ref. 611 504 6F £ 259.00**

2 | Width: 950 mm. Length: 1250 mm. Weight: 6.5 kg.

**Ref. 611 505 6F £ 379.00**

Other sizes available on request.

## 3–6 | Conductive anti-fatigue matting

- Protects components from static discharge
- Non-slip
- For dry indoor areas – not suitable for high voltage areas

Height: 9 mm. Material: PVC. Temperature resistance:  $-10^{\circ}\text{C}$  to  $+60^{\circ}\text{C}$ . Colour: grey. Weight:  $3.5\text{ kg/m}^2$ . Type: single-ply. Feature: non-slip / anti-fatigue / conductive / tapered / ESD version. Work area: dry. Surface: closed.

Width: 900 mm. Max. roll length: 18.3 m. Weight: 3.5 kg. Form of delivery: cuts per metre.

**3 | Ref. 516 117 6F £/m 255.00**

4 | Width: 600 mm. Length: 900 mm. Weight: 2 kg.

**Ref. 516 114 6F £ 149.00**

5 | Width: 900 mm. Length: 1500 mm. Weight: 4 kg.

**Ref. 516 115 6F £ 319.00**

6 | Width: 900 mm. Length: 18300 mm. Weight: 55 kg.

**Ref. 516 116 6F £ 2250.00**



Slip resistant

## 7–8 | Insulated matting

- Protects users from electric shocks
- Suitable for working with live electrical parts in dry indoor areas
- Tested to 50000 V in accordance with EN 60243-1 (VDE 0303, section 21) IEC 60243-1:1998

Width: 1000 mm. Height: 4.5 mm. Material: natural rubber. Temperature resistance:  $-10^{\circ}\text{C}$  to  $+60^{\circ}\text{C}$ . Colour: grey. Weight:  $6.5\text{ kg/m}^2$ . Feature: non-slip / insulating. Work area: dry. Surface: closed.

Length: 10 m. Weight: 65 kg. Form of delivery: 10 m roll.

**7 | Ref. 516 119 6F £ 749.00**

Max. roll length: 10 m. Weight: 6.5 kg. Form of delivery: cuts per metre.

**8 | Ref. 516 121 6F £/m 69.90**