



6

## 6 | Mini air ratchets

- Fully sealed head prevents swarf or similar chips from entering. Low vibration
- Short design

Max. operating pressure: 6.3 bar.  
Length: 150 mm. Noise level: 90 dB(A).  
Weight: 0.55 kg.

6 | Ref. 570 554 6F £ 195.00



7



Made in Germany

## 7 | HiPer 3HP fine tooth reversible ratchets

- A huge amount of extra force in comparison to ratchets with comparable dimensions
- Locking function of the shift lever provides protection against accidental reversal
- Service life increased by the use of the latest lubricants in the ratchet

mechanism

Weight: 0.08 kg. Type: with ball lock.  
Length: 116 mm. Conforms to: DIN 3122, ISO 3315.

7 | Ref. 570 553 6F £ 59.90

## 10 | HiPer 6HP fine tooth reversible ratchets

- Low manufacturing tolerances prevent dirt from entering
- High quality, easy to clean, corrosion resistant
- Suspension option integrated in the handle

lock. Handle: 2-component handle.  
Length: 275 mm. Conforms to: DIN 3122, ISO 3315. Square drive in inches: 1/2. Tooth: 90.

10 | Ref. 570 552 6F £ 74.90

Weight: 0.62 kg. Type: with ball

## 11 – 12 | Torque wrenches

- Designed for demanding use in the workshop
- Wide range of uses for controlled tightening of screws when changing tyres, bicycle, passenger vehicle and commercial vehicle applications and diverse applications in industry and trades
- Optimised sealing ring for protection from foreign particles


Actuation accuracy:  $\pm 3\%$ . Conforms to: DIN 3120.

Weight: 0.41 kg. Width: 24 mm. Length: 234 mm. Square drive in inches: 1/4. Tooth: 20.

12 | Ref. 570 550 6F £ 245.00

Weight: 1.16 kg. Width: 44 mm. Length: 519 mm. Square drive in inches: 1/2. Tooth: 32.

11 | Ref. 570 551 6F £ 239.00

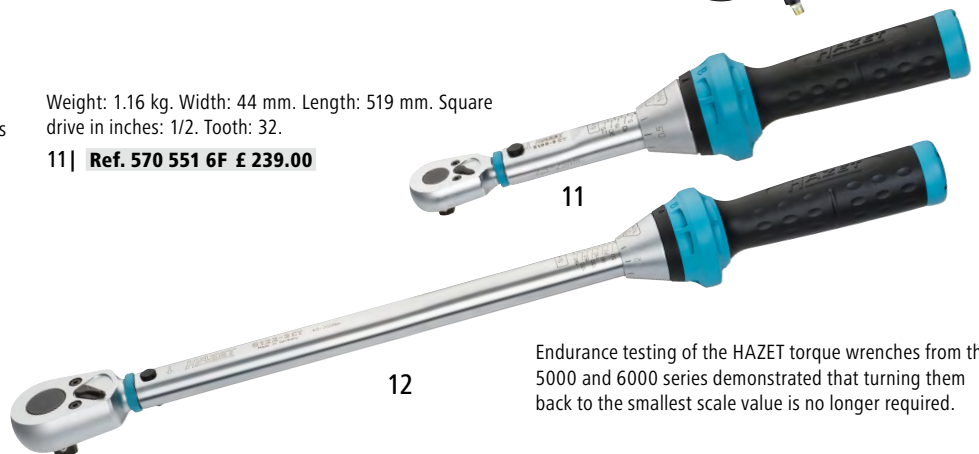

8

All items on this page



## 8 | MINI TWIN turbo extra short impact wrenches

- Exhaust air is guided downwards through the handle
- Low vibration and easy operation
- Innovative 8-blade air motor with 25% higher impact performance ensures maximum torques

Type: two-level (clockwise), one-level (anti-clockwise). Max. operating

pressure: 6.3 bar. Noise level: 92.5 dB(A). Weight: 1.64 kg.

8 | Ref. 570 555 6F £ 245.00

## 9 | Hose reels

Area of application: commercial vehicle.  
Hose length: 15 m. Length: 378 mm.  
Width: 459 mm.

9 | Ref. 570 548 6F £ 245.00

10



WORKSHOP

Endurance testing of the HAZET torque wrenches from the 5000 and 6000 series demonstrated that turning them back to the smallest scale value is no longer required.