

13–17 | Hose reels

- Sturdy steel model for demanding industrial applications
- Reduced hose wear due to PVC rollers on the outlet

Housing material: steel, powder coated.



	13	14	15	16	17
Area of application	for compressed air and water	for compressed air and water	for compressed air and water	for water and oil	for water and oil
Max. pressure up to	bar 20	20	20	138	155
Nominal hose diameter	DN 9	DN 12	DN 12	DN 12	DN 9
External connection	inch G 3/8	G 1/2	G 1/2	G 1/2	G 3/8
Hose length	m 20	15	20	15	20
	Ref. 176 329 6F	176 328 6F	176 330 6F	176 331 6F	176 332 6F
	£ 265.00	299.00	339.00	329.00	349.00


18–25 | Hose reels

Area of application: for air. Max. pressure up to: 15 bar. Nominal hose diameter: DN 10.

External connection: G 3/8 inch. Housing material: cast aluminium. Attachment option: Can be fastened to wall, ceiling, floor, machines and vehicles. Mechanism: return spring and locking mechanism.



	18	19	20	21	22	23	24	25
Hose length	m 10	10	12	12	15	15	20	20
Length	mm 355	355	355	355	380	380	380	380
Height	mm 325	325	325	325	375	375	375	375
Type	without SCS® duplex brake	with SCS® duplex brake	without SCS® duplex brake	with SCS® duplex brake	without SCS® duplex brake	with SCS® duplex brake	without SCS® duplex brake	with SCS® duplex brake
	Ref. 538 725 6F	538 727 6F	233 889 6F	944 128 6F	538 726 6F	538 728 6F	506 193 6F	944 129 6F
	£ 419.00	599.00	419.00	519.00	529.00	719.00	479.00	599.00
Accessories								
Quick release coupling	Ref. –	233 811 6F	–	–	233 811 6F	–	–	–
	£	13.95			13.95			
Swivel bracket	Ref. –	233 773 6F	–	–	233 773 6F	–	–	–
	£	57.90			57.90			

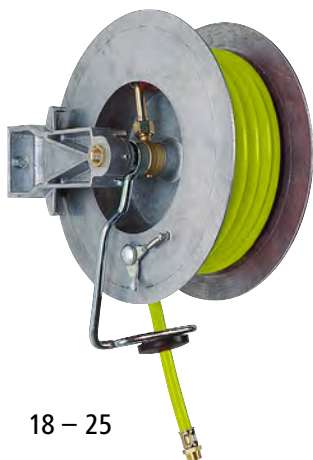

18 – 25



27 + 29



31–33 | Hose reels with controlled retraction

- For air, water, or oil – max. 60 bar

Area of application: for air, water, or oil. Max. pressure up to: 60 bar. Nominal hose diameter: DN 12. External connection: G 1/2 inch. Type: with SCS® duplex brake.

26–30 | Hose reels

- Sturdy, durable steel design
- Optionally available with automatic roll up for controlled, braked retraction

Area of application: for air, water, or oil. Max. pressure up to: 60 bar. Nominal hose diameter: DN 12. External connection: G 1/2 inch. Housing material: painted, partially galvanised. Attachment option: Can be fastened to wall, ceiling, floor, machines and vehicles. Mechanism: return spring and locking mechanism. Type: without SCS® duplex brake.



SCS® duplex brake.

The SCS® duplex brake guarantees controlled, braked retraction without risk for people and machines. Only functional in direction of retraction.

	26	27	28	29	30
Hose length	m 10	10	15	15	20
	Ref. 265 098 6F	506 188 6F	265 128 6F	506 189 6F	265 144 6F
	£ 489.00	639.00	689.00	779.00	699.00
Accessories					
Swivel bracket	Ref. 265 233 6F	607 726 6F	265 233 6F	607 726 6F	265 233 6F
	£ 149.00	92.90	149.00	92.90	149.00

	31	32	33
Hose length	m 10	15	20
	Ref. 944 131 6F	944 133 6F	944 135 6F
	£ 759.00	949.00	979.00
Accessories			
Swivel bracket	Ref. 265 233 6F	265 233 6F	265 233 6F
	£ 149.00	149.00	149.00

Free delivery to UK mainland for over 70,000 products!

SALES FREEPHONE 0800 0234 771

KAISER+KRAFT