

All items on this page



## Mini air ratchets

- Fully sealed head prevents swarf or similar chips from entering. Low vibration
- Short design

Max. operating pressure: 6.3 bar. Length: 150 mm. Air consumption: 72 l/min.  
Max. release torque: 40 N-m. Noise level: 90 dB(A). Sound power level: 101 dB(A).  
Weight: 0.55 kg.

► Ref. 570 554 3H £ 141.00



## HiPer 3HP fine tooth reversible ratchets

- A huge amount of extra force in comparison to ratchets with comparable dimensions
- Locking function of the shift lever provides protection against accidental reversal
- Service life increased by the use of the latest lubricants in the ratchet mechanism

Weight: 0.08 kg. Type: with ball lock. Length: 116 mm. Conforms to: DIN 3122, ISO 3315.  
Square drive in inches: 1/4. Tooth: 90.

► Ref. 570 553 3H £ 54.00

## HiPer 6HP fine tooth reversible ratchets

- Low manufacturing tolerances prevent dirt from entering
- High quality, easy to clean, corrosion resistant
- Suspension option integrated in the handle

Weight: 0.62 kg. Type: with ball lock. Length: 275 mm. Conforms to: DIN 3122, ISO 3315.  
Square drive in inches: 1/2. Tooth: 90.

► Ref. 570 552 3H £ 66.00

## Torque wrenches

- Designed for demanding use in the workshop
- Wide range of uses for controlled tightening of screws when changing tyres, bicycle, passenger vehicle and commercial vehicle applications and diverse applications in industry and trades
- Optimised sealing ring for protection from foreign particles


Actuation accuracy:  $\pm 3\%$ . Conforms to: DIN 3120.

Weight: 1.16 kg. Width: 44 mm. Length: 519 mm. Square drive in inches: 1/2. Tooth: 32.

► Ref. 570 551 3H £ 171.00

Weight: 0.41 kg. Width: 24 mm.  
Length: 234 mm. Square drive in inches: 1/4.  
Tooth: 20.

► Ref. 570 550 3H £ 175.00

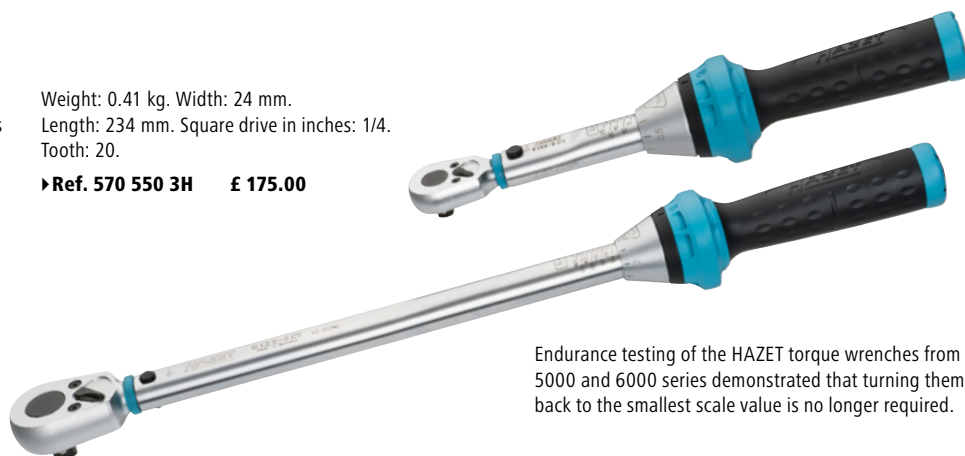

Endurance testing of the HAZET torque wrenches from the 5000 and 6000 series demonstrated that turning them back to the smallest scale value is no longer required.

## MINI TWIN turbo extra short impact wrenches

- Exhaust air is guided downwards through the handle
- Low vibration and easy operation
- Innovative 8-blade air motor with 25% higher impact performance ensures maximum torques

Type: two-level (clockwise), one-level (anti-clockwise). Max. operating pressure: 6.3 bar. Recommended torque: 542 N-m. Air consumption: 133.1 l/min. Max. release torque: 1600 N-m. Noise level: 92.5 dB(A). Sound power level: 103.5 dB(A). Weight: 1.64 kg.

► Ref. 570 555 3H £ 219.00



## Hose reels

- Hoses are no longer left lying around, reducing the risk of accidents
- Automatic guide ensures the hose rolls up neatly, wound using brake mechanism to prevent accidents
- Integrated drill hole template on cardboard packaging to help with mounting

Area of application: commercial vehicle.  
Hose length: 15 m. Length: 378 mm.  
Width: 459 mm.

► Ref. 570 548 3H £ 167.00



WORKSHOP