

Hose reels

- Sturdy steel model for demanding industrial applications
- Reduced hose wear due to PVC rollers on the outlet

Housing material: steel, powder coated.

QUIPO
★★★

5
Year
Guarantee




Area of application		for compressed air and water	for compressed air and water	for compressed air and water	for water and oil	for water and oil
Max. pressure up to	bar	20	20	20	138	155
Nominal hose diameter		DN 9	DN 12	DN 12	DN 12	DN 9
External connection	inch	G 3/8	G 1/2	G 1/2	G 1/2	G 3/8
Hose length	m	20	15	20	15	20
	Ref.	▶176 329 3H	▶176 328 3H	▶176 330 3H	▶176 331 3H	▶176 332 3H
	£	299.00	325.00	355.00	345.00	365.00

Hose reels

Area of application: for air. Max. pressure up to: 15 bar. Nominal hose diameter: DN 10. External connection: G 3/8 inch. Housing material: cast aluminium. Attachment option: Can be fastened to wall, ceiling, floor, machines and vehicles. Mechanism: return spring and locking mechanism. Width: 166 mm.



PVC hose with brake

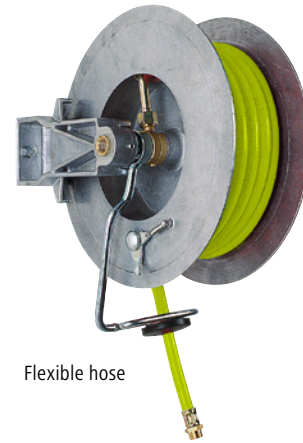

Flexible hose



More Information
kaiserkraft.co.uk

Hose length	m	10	10	12	12	15	15	20	20
Fittings		flexible hose	flexible hose	PVC hose	PVC hose	flexible hose	flexible hose	PVC hose	PVC hose
Length	mm	355	355	355	355	380	380	380	380
Height	mm	325	325	325	325	375	375	375	375
Type		without SCS® duplex brake	with SCS® duplex brake	without SCS® duplex brake	with SCS® duplex brake	without SCS® duplex brake	with SCS® duplex brake	without SCS® duplex brake	with SCS® duplex brake
	Ref.	▶538 725 3H	538 727 3H	▶233 889 3H	944 128 3H	▶538 726 3H	538 728 3H	▶506 193 3H	944 129 3H
	£	389.00	535.00	345.00	519.00	499.00	639.00	445.00	619.00
Accessories									
Quick release coupling	Ref.	233 811 3H	233 811 3H	233 811 3H	233 811 3H	233 811 3H	233 811 3H	233 811 3H	233 811 3H
	£	10.75	10.75	10.75	10.75	10.75	10.75	10.75	10.75
Swivel bracket	Ref.	233 773 3H	233 773 3H	233 773 3H	233 773 3H	233 773 3H	233 773 3H	233 773 3H	233 773 3H
	£	56.00	56.00	56.00	56.00	56.00	56.00	56.00	56.00

Hose reels

- Sturdy, durable steel design
- Optionally available with automatic roll up for controlled, braked retraction

Area of application: for air, water, or oil.
Max. pressure up to: 60 bar.
Nominal hose diameter: DN 12.
External connection: G 1/2 inch.
Housing material: painted, partially galvanised.
Attachment option: Can be fastened to wall, ceiling, floor, machines and vehicles.
Mechanism: return spring and locking mechanism.
Type: without SCS® duplex brake.



Model with sheet steel housing

Hose reels with controlled retraction

- For air, water, or oil – max. 60 bar

Area of application: for air, water, or oil.
Max. pressure up to: 60 bar.
Nominal hose diameter: DN 12.
External connection: G 1/2 inch.
Type: with SCS® duplex brake.



Video online!

SCS® duplex brake.

The SCS® duplex brake guarantees controlled, braked retraction without risk for people and machines. Only functional in direction of retraction.

Hose length	m	10	10	15	15	20
Fittings		cladding	cladding	cladding	cladding	cladding
	Ref.	▶265 098 3H	506 188 3H	265 128 3H	506 189 3H	265 144 3H
	£	575.00	679.00	739.00	869.00	809.00
Accessories						
Swivel bracket	Ref.	265 233 3H	607 726 3H	265 233 3H	607 726 3H	265 233 3H
	£	135.00	111.00	135.00	111.00	135.00

Hose length	m	10	15	20
	Ref.	944 131 3H	944 133 3H	944 135 3H
	£	739.00	919.00	919.00
Accessories				
Swivel bracket	Ref.	265 233 3H	265 233 3H	265 233 3H
	£	135.00	135.00	135.00

Free delivery to UK mainland for over 80,000 products.

UK
Ireland

01442 238 000
1 800 677 300

KAISER+KRAFT