



PET straps

- Extremely tear resistant – ideal for heavy goods and high volume strapping
- Five times lighter than steel
- No rust marks, no sharp edges

Material: PET. Core Ø: 406 mm. Colour: green. Usage period: medium-term storage.

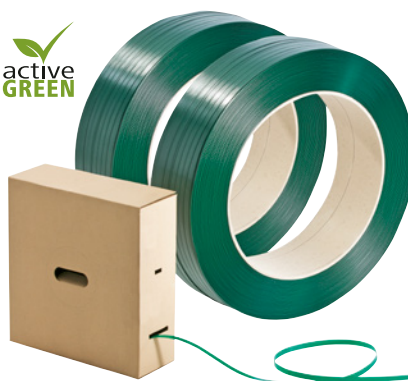

More products online!

Strap width	mm	12.7	16	16
Strap length	m	2500	1750	2000
Material thickness	mm	0.6	0.73	0.6
Tensile strength	kg/cm ²	321	450	401
Weight	kg	22	23.5	23
Application		medium weight products high volume strapping	medium weight products high volume strapping for industrial use	medium weight products high volume strapping
	Ref.	►979 822 3H	►979 820 3H	►979 819 3H
	£	135.00	135.00	145.00



Threading rods


For strap type: all. Colour: black. For strap width: < 21 mm.

Weight: 1 kg.

►Ref. 759 677 3H £ 32.50

Weight: 2 kg. Pack of: 2.

►Ref. 759 682 3H £ / pack 48.00

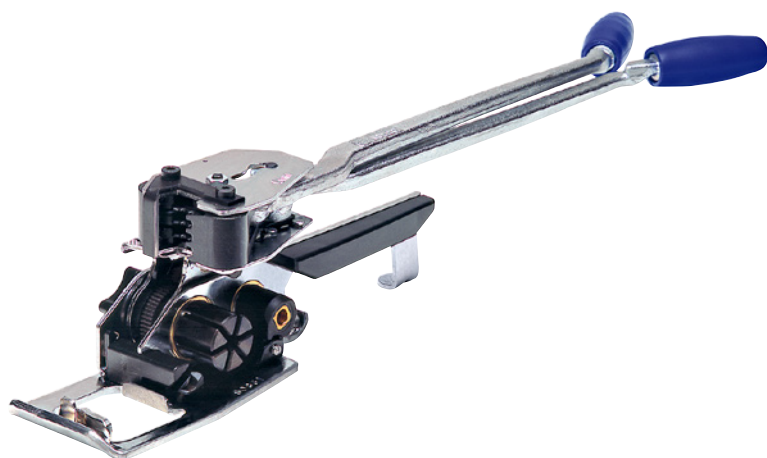

Combination tensioning and sealing tools

- Practical combination tensioning tool for convenient use
- Particularly high tensioning force

Tensioning type: manual. Sealing: seals. For strap type: PET / composite. For strapping thickness: 0,5 – 0,8 mm. Height: 550 mm. Width: 110 mm. Depth: 100 mm.

For strap width: 13 mm.

Ref. 611 267 3H £ 595.00

For strap width: 16 mm.

Ref. 611 268 3H £ 619.00



Strap dispensers for PP, PET and heavy duty PET strapping

- Includes threading rod with holder

For strap type: PP / PET / PET heavy duty. Type: mobile, with storage compartment. Fittings: with roller brake. Colour: zinc plated. For strap width: 13 – 19 mm. For core diameter: 406 mm. For roll width: 150 mm. Length: 700 mm. Width: 500 mm. Height: 1000 mm. Material: sheet steel, galvanised. Weight: 18.5 kg.

►Ref. 985 437 3H £ 429.00

WORKSHOP