


PREMIUM mobile safety steps

- Industrial quality for the toughest requirements
- Sturdy steel construction
- Working height up to 5.5 m

Frame material: steel. Frame colour: light blue RAL 5012. Platform width: 554 mm. Platform depth: 605 mm. Step width: 500 mm. Step depth: 180 mm. Access: single sided. Access type: steps. Wheel Ø: 160 mm. Slope: 60°. Step spacing: 200 mm. Feature: mobile. Wheel fittings: 2 swivel castors with wheel stop, 2 fixed castors. Max. load: 150 kg.

Supplied flat pack – easy self-assembly.

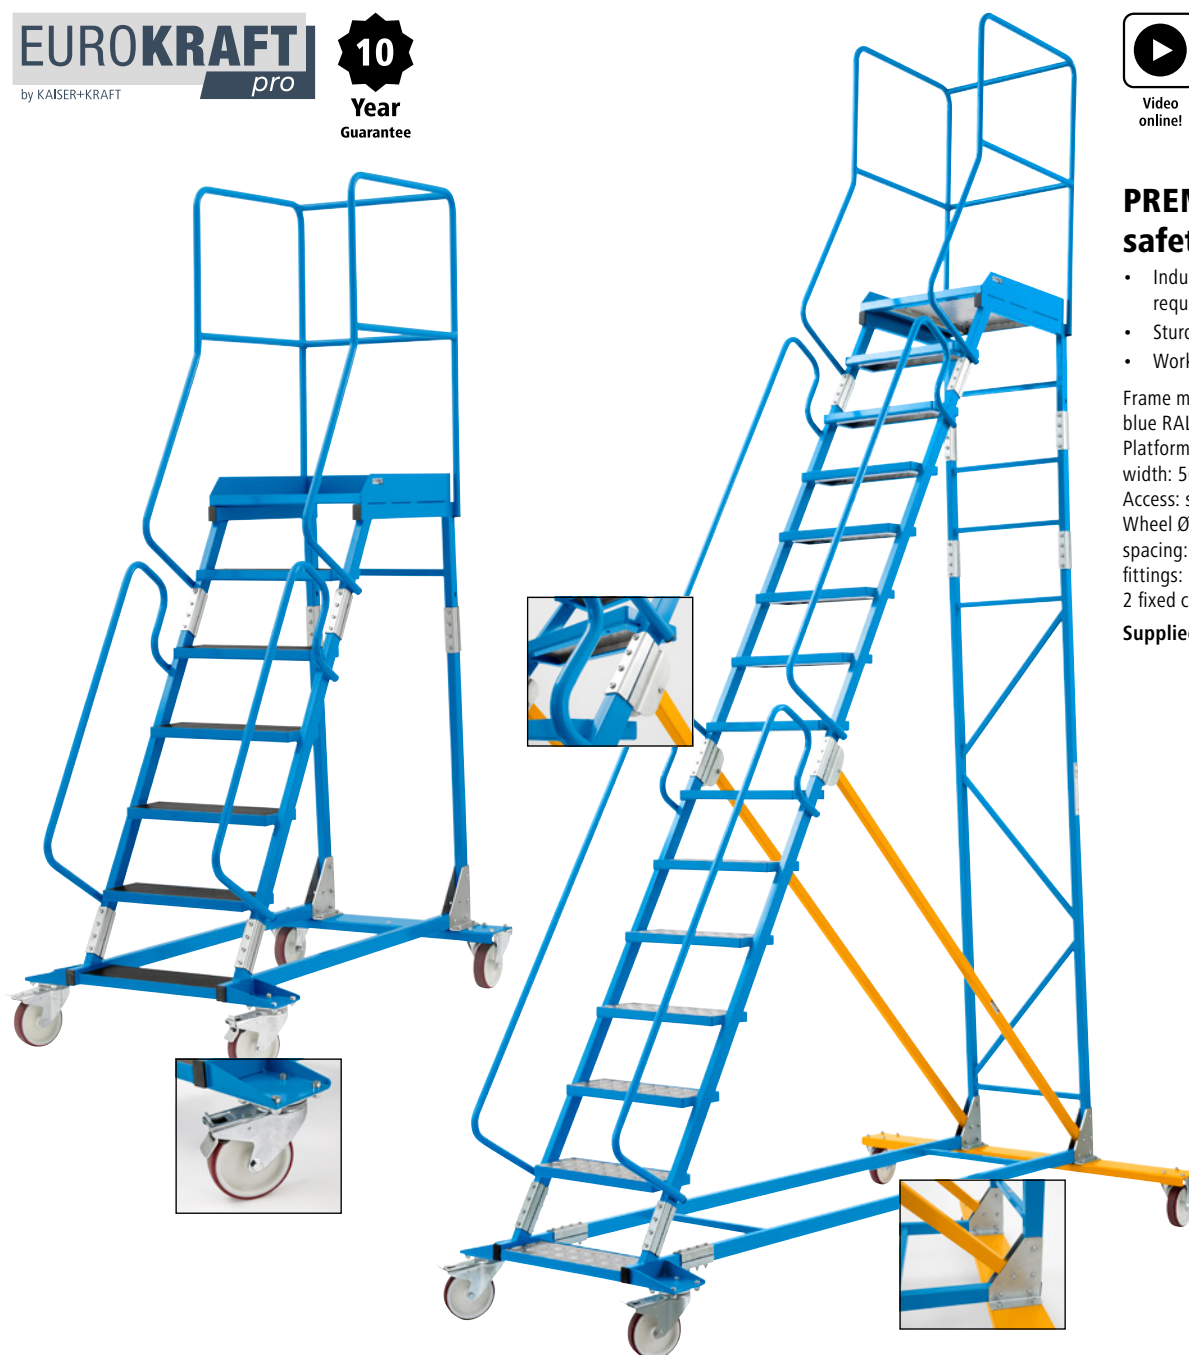

Ideal for use in a warehouse and in production areas.

Produced and tested in accordance with EN 131.



Steps with ribbed aluminium



Steps with ribbed rubber



Steps with phenolic plywood

Steps incl. platform	pcs.	4	5	6	7	8	9	10	11	12	13	14	15
Platform height	mm	935	1170	1405	1640	1875	2110	2345	2580	2815	3050	3285	3520
Overall depth	mm	1180	1310	1460	1610	1750	1905	2050	2200	2350	2500	2645	2790
Overall width	mm	880	880	880	880	880	1100	1100	1100	1300	1300	1500	1500
Material of treads													
aluminium, ribbed	Ref.	►499 925 3H	►499 928 3H	►499 931 3H	►499 934 3H	►499 937 3H	►499 940 3H	►499 943 3H	►499 946 3H	►499 949 3H	►499 952 3H	►499 955 3H	►499 958 3H
	€	1700.00	1980.00	2200.00	2525.00	2750.00	3025.00	3300.00	3525.00	3700.00	3725.00	4400.00	4450.00
phenolic plywood	Ref.	►499 926 3H	►499 929 3H	►499 932 3H	►499 935 3H	►499 938 3H	►499 941 3H	►499 944 3H	►499 947 3H	►499 950 3H	►499 953 3H	►499 956 3H	►499 959 3H
	€	1640.00	1900.00	2150.00	2475.00	2700.00	2950.00	3250.00	3400.00	3625.00	3700.00	4400.00	4400.00
ribbed rubber	Ref.	►499 927 3H	►499 930 3H	►499 933 3H	►499 936 3H	►499 939 3H	►499 942 3H	►499 945 3H	►499 948 3H	►499 951 3H	►499 954 3H	►499 957 3H	►499 960 3H
	€	1700.00	1960.00	2200.00	2525.00	2750.00	3025.00	3300.00	3475.00	3700.00	3725.00	4450.00	4450.00