


ADVANCED SAFE-T mobile access towers

- Platform width: 0,61 m. Platform length: 1.58 m. Material: aluminium. Max. load: 200 kg/m². Wheel fittings: swivel castor with spindle. Wheel Ø: 150 mm. Scaffolding width: 0.72 m. Conforms to: EN 1004.
- Flexible – can be expanded using additional modules
- Compact – little space required for storage and transport
- Practical – set up or disassembly in only 12 minutes
- Height adjustable castors allow use on uneven ground



More products online!

Platform height		1,25	2,25	3,25	4,25	5,25	6,25
Working height	m	3.25	4.25	5.25	6.25	7.25	8.25
Tower height	m	2.47	3.47	4.34	5.34	6.34	7.34
Weight	kg	50	81.6	106.8	118.8	144	156
	Ref.	485 818 3H	485 822 3H	485 823 3H	485 824 3H	485 825 3H	485 826 3H
	£	929.00	1420.00	1680.00	1900.00	2400.00	2525.00

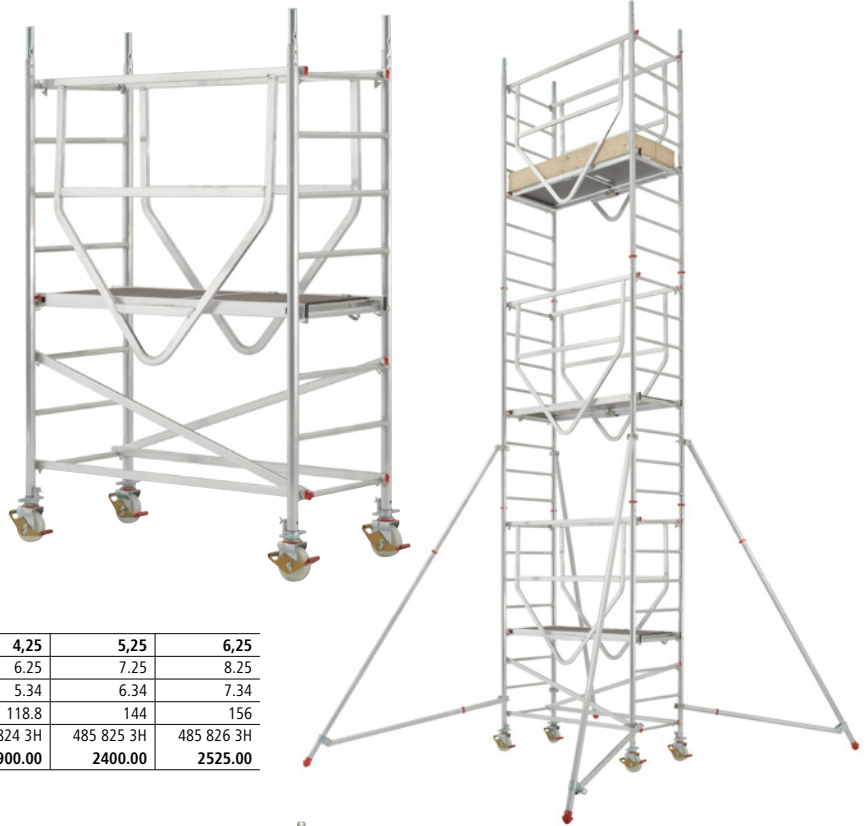

5

Year
Guarantee

NEW


Layher

Einfach sicher. Die Steigtechnik.

SoloTower one-person mobile access towers

- Quick and easy assembly by means of a snap-on claw
- Efficient set-up and disassembly by only one person

Platform width: 1,15 m. Platform length: 0.8 m.
Material: aluminium. Max. load: 2 kN/m². Wheel Ø: 150 mm. Conforms to: DIN EN 1004.

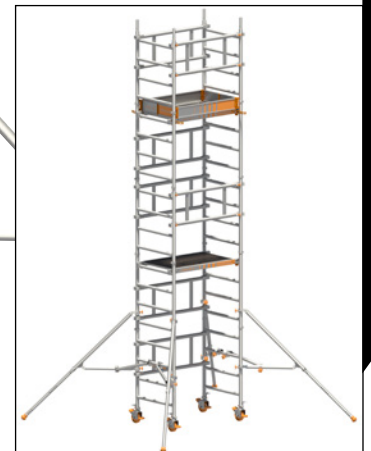

Platform height	m	2,15	3,15	4,15
Working height	m	4.15	5.15	6.15
Tower height	m	3.37	4.37	5.37
Weight	kg	118.8	151.9	167.6
	Ref.	586 931 3H	586 932 3H	586 933 3H
	£	2300.00	2750.00	2950.00

Free delivery to UK mainland
for over 80,000 products.

UK
Ireland

01442 238 000
1 800 677 300

KAISER+KRAFT