

1–2 | Pedestal fans

- 3 speed settings, adjustable using push switch, 85° oscillation, can be disengaged
- Vertical inclination of the safety cage is adjustable, guard screen can be removed for cleaning purposes
- Powerful plastic impeller and maintenance free motor with overheating protection for high air output and continuous operation

Rotor blade diameter: 400 mm. Safety cage diameter: 440 mm. Number of speed settings: 3 pcs. Max. speed: 1145 rpm. Max. air volume: 4180 m³/h. Power: 50 watt. Mains voltage: 220 – 240 V / ~50 Hz. Height adjustment range: 1125 – 1315 mm. Oscillation: 85°. Foot plate diameter: 420 mm. Sound pressure LPA (–3 m): 38.5 dB(A). LWA sound power level for specifying noise emissions: 56.0 dB(A). Weight: 5.3 kg. Housing colour: white. Property: height adjustable / swivelling.

Supplied flat pack – easy self-assembly.

1 | Ref. 970 365 6H € 62.90

**2 | Minimum order quantity: 3 pcs.
Ref. 970 366 6H € 52.90**

3–4 | Pedestal fans

- In a heavy-duty metal version with satin finish, 3 speed settings, adjustable using a rotary switch, 85° oscillation, can be disengaged
- Vertical inclination of the safety cage is adjustable, guard screen can be removed for cleaning purposes
- Powerful aluminium impeller and maintenance free motors with overheating protection for high air output and continuous operation

Rotor blade diameter: 400 mm. Safety cage diameter: 452 mm. Number of speed settings: 3 pcs. Max. speed: 1150 rpm. Max. air volume: 2500 m³/h. Power: 50 watt. Mains voltage: 220 – 240 V / ~50 Hz. Height adjustment range: 970 – 1300 mm. Oscillation: 85°. Height: 1300 mm. Width: 452 mm. Depth: 400 mm. Foot plate diameter: 400 mm. Sound pressure LPA (–3 m): 41.9 dB(A). LWA sound power level for specifying noise emissions: 61.6 dB(A). Weight: 7.7 kg. Housing colour: brushed chrome. Property: height adjustable / swivelling.

Supplied flat pack – easy self-assembly.

3 | Ref. 610 306 6H € 149.00

**4 | Minimum order quantity: 3 pcs.
Ref. 614 231 6H € 139.00**

5–6 | Pedestal fans with remote control

- Can be operated from the fan itself or using the infrared remote control
- 3 speed settings can be activated using the push button switch
- Housing and impeller made of impact resistant plastic

Rotor blade diameter: 400 mm. Safety cage diameter: 440 mm. Number of speed settings: 3 pcs. Max. speed: 1145 rpm. Max. air volume: 4180 m³/h. Power: 50 watt. Mains voltage: 220 – 240 V / ~50 Hz. Height adjustment range: 1140 – 1335 mm. Oscillation: 85°. Foot plate diameter: 420 mm. Sound pressure LPA (–3 m): 37.8 dB(A). LWA sound power level for specifying noise emissions: 55.3 dB(A). Weight: 5.4 kg. Housing colour: charcoal. Fittings: remote control. Property: height adjustable / swivelling.

Supplied flat pack – easy self-assembly.

5 | Ref. 970 367 6H € 74.90

**6 | Minimum order quantity: 3 pcs.
Ref. 970 368 6H € 69.90**

7–8 | Pedestal fans


- With a strong air flow and a powerful, 3-speed fan for perfect cooling for commercial use or large rooms
- Vertical inclination can be adjusted over a range of approx. 160° to adjust the air flow and be locked in place, guard screen can be removed for cleaning
- High output motor with high-quality ball bearings and thermal overload protection in accordance with EN 60335-2-80 to provide a long, uninterrupted service life of the device

Rotor blade diameter: 400 mm. Safety cage diameter: 450 mm. Number of speed settings: 3 pcs. Max. speed: 1305 rpm. Max. air volume: 5685 m³/h. Power: 110 watt. Mains voltage: 220 – 240 V / ~50 Hz. Height adjustment range: 1160 – 1460 mm. Foot plate diameter: 480 mm. Sound pressure LPA (–3 m): 40.7 dB(A). LWA sound power level for specifying noise emissions: 62.9 dB(A). Weight: 10.76 kg. Housing colour: chrome. Property: height adjustable.

Supplied flat pack – easy self-assembly.

7 | Ref. 860 697 6H € 209.00

**8 | Minimum order quantity: 3 pcs.
Ref. 860 700 6H € 189.00**

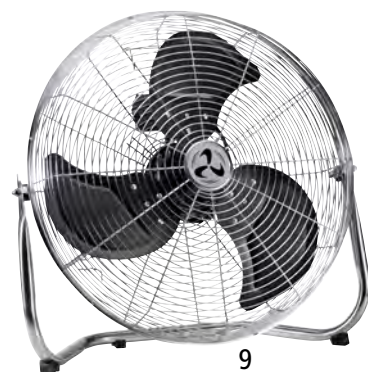

9–12 | Floor fans

- With powerful air flow for commercial use or use in large rooms
- Comfortable carrying handle – can also be used for wall mounting
- Safety cage tilts to change direction of air flow

Number of speed settings: 3 pcs. Mains voltage: 220 – 240 V / 50 Hz. Housing colour: chrome.

Rotor blade diameter: 500 mm. Safety cage diameter: 550 mm. Max. speed: 1310 rpm. Max. air volume: 7860 m³/h. Power: 0,120 kW. Sound pressure LPA (–3 m): 46.8 dB(A). LWA sound power level for specifying noise emissions: 69.1 dB(A). Weight: 6.8 kg.

9 | Ref. 610 303 6H € 139.00

**10 | Minimum order quantity: 3 pcs.
Ref. 863 831 6H € 125.00**

Rotor blade diameter: 400 mm. Safety cage diameter: 450 mm. Max. speed: 1305 rpm. Max. air volume: 5685 m³/h. Power: 0,110 kW. Sound pressure LPA (–3 m): 40.7 dB(A). LWA sound power level for specifying noise emissions: 62.9 dB(A). Weight: 6.26 kg.

11 | Ref. 977 760 6H € 115.00

**12 | Minimum order quantity: 3 pcs.
Ref. 863 823 6H € 99.90**