

13–16| Small roller conveyors

- Optimises the material flow in the company
- Modular system, making it individually adjustable
- Transport flow also possible on a slight pitch

Design of frame: aluminium. Overall height: 61.5 mm. Roller Ø: 20 mm. Roller material: plastic. Axle spacing: 25 mm.



Planning
Expertise




Additional track widths, lengths, passages, as well as galvanised rollers and 45° curves on request.

Track section is completely assembled. Prices do not include frame supports – suitable additions can be found under Accessories / spare parts, or in the Combinations field.

		13	14	15	16
Track width	mm	200	300	400	500
Overall width	mm	240	340	440	540
Max. load with 1 m frame support spacing	kg	60	55	55	50
Type					
90° curve	Ref.	891 134 6H	891 215 6H	891 304 6H	891 371 6H
	€	949.00	1145.00	1195.00	1895.00
straight 1 m	Ref.	891 037 6H	891 142 6H	891 223 6H	716 126 6H
	€	419.00	429.00	439.00	469.00
straight 1.5 m	Ref.	891 045 6H	891 150 6H	891 231 6H	716 127 6H
	€	599.00	599.00	619.00	639.00
straight 2 m	Ref.	891 053 6H	891 169 6H	891 258 6H	716 128 6H
	€	729.00	799.00	819.00	819.00

19

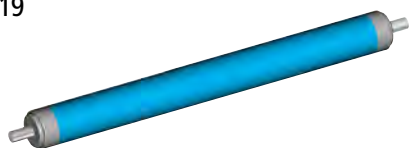

18–21| Conveyor rollers

- Ideal rolling characteristics
- Easy and quick to assemble
- High quality workmanship

Roller bearing: ball bearing. Axle Ø: 6 mm. Material: plastic. Colour: blue. Roller Ø: 20 mm.

Roller length: 200 mm. Installation length: 200 mm. Max. load: 1.3 kg. Axle length: 220 mm.

18| Ref. 891 649 6H € 15.95

Roller length: 300 mm. Installation length: 300 mm. Max. load: 1.2 kg. Axle length: 320 mm.

19| Ref. 891 657 6H € 17.95

Roller length: 400 mm. Installation length: 401 mm. Max. load: 1 kg. Axle length: 421 mm.

20| Ref. 891 665 6H € 19.95

Roller length: 500 mm. Installation length: 502 mm. Max. load: 0.9 kg. Axle length: 522 mm.

21| Ref. 891 673 6H € 21.90

24–28| Dual frame supports

- Used for stationary track installation
- Infinitely height adjustable, with swivel hinge
- Quick and easy to assemble

Material: rectangular steel pipe, galvanised. Max. load: 200 kg.


17| Quick connectors

Pack of: 4.

17| Ref. 515 993 6H €/pack 38.90

22–23| Lateral guide rails for light-duty roller conveyor

Height adjustment range: 50 – 130 mm. Material: tubular steel, zinc plated. Diameter: 25 mm.

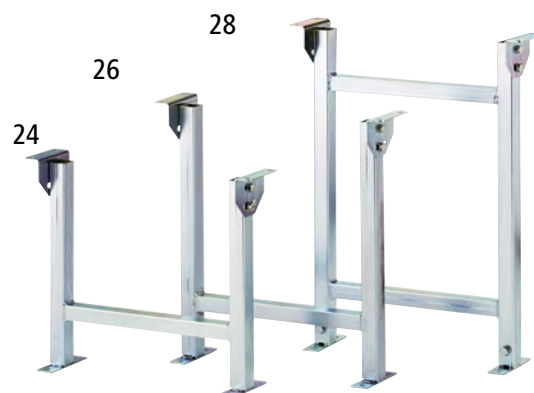

Max. load 200 kg.

22| Side guide: curve 90° interior.

Ref. 903 690 6H € 79.90

23| Side guide: curve 90° exterior.

Ref. 903 691 6H € 109.00

		24	25	26	27	28
Track width	mm	200	300	400	500	600
Height adjustment range						
330 – 480 mm	Ref.	977 617 6H	903 676 6H	977 622 6H	903 677 6H	903 878 6H
	€	125.00	125.00	125.00	125.00	125.00
380 – 580 mm	Ref.	977 618 6H	903 678 6H	977 623 6H	903 679 6H	903 879 6H
	€	125.00	125.00	125.00	125.00	125.00
470 – 750 mm	Ref.	977 619 6H	903 681 6H	977 625 6H	903 682 6H	903 880 6H
	€	139.00	139.00	139.00	139.00	139.00
580 – 950 mm	Ref.	977 620 6H	903 683 6H	977 626 6H	903 684 6H	903 881 6H
	€	139.00	139.00	139.00	139.00	139.00
730 – 1250 mm	Ref.	977 621 6H	903 685 6H	977 627 6H	903 686 6H	903 882 6H
	€	149.00	149.00	149.00	149.00	149.00

29–32| Side guide rails


- Prevents from goods falling off the sides of the skate wheel conveyor
- Quick and easy to assemble
- High quality workmanship

Height adjustment range: 50 – 130 mm.

Material: tubular steel, zinc plated.

Diameter: 25 mm.

29

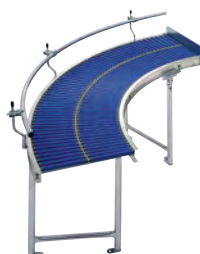


33–36| End stops

- Prevents goods from falling off at the end of the track
- Quick and easy to assemble
- High quality workmanship

Material: sheet steel, galvanised.

33



		29	30	31	32
Length	m	1	1.5	2	3
Side guide					
straight on both sides	Ref.	515 988 6H	515 989 6H	515 991 6H	515 992 6H
	€	89.90	139.00	175.00	255.00
straight on one side	Ref.	515 984 6H	515 985 6H	515 986 6H	515 987 6H
	€	48.90	74.90	99.90	155.00

		33	34	35	36
Track width	mm	200	300	400	500
	Ref.	891 762 6H	892 084 6H	892 092 6H	892 106 6H
	€	69.90	69.90	69.90	69.90

All articles ex works plus charges.

Phone +49 711 3465 6999

KAISER+KRAFT

173