




Special designs, 45° curves and passages available on request.

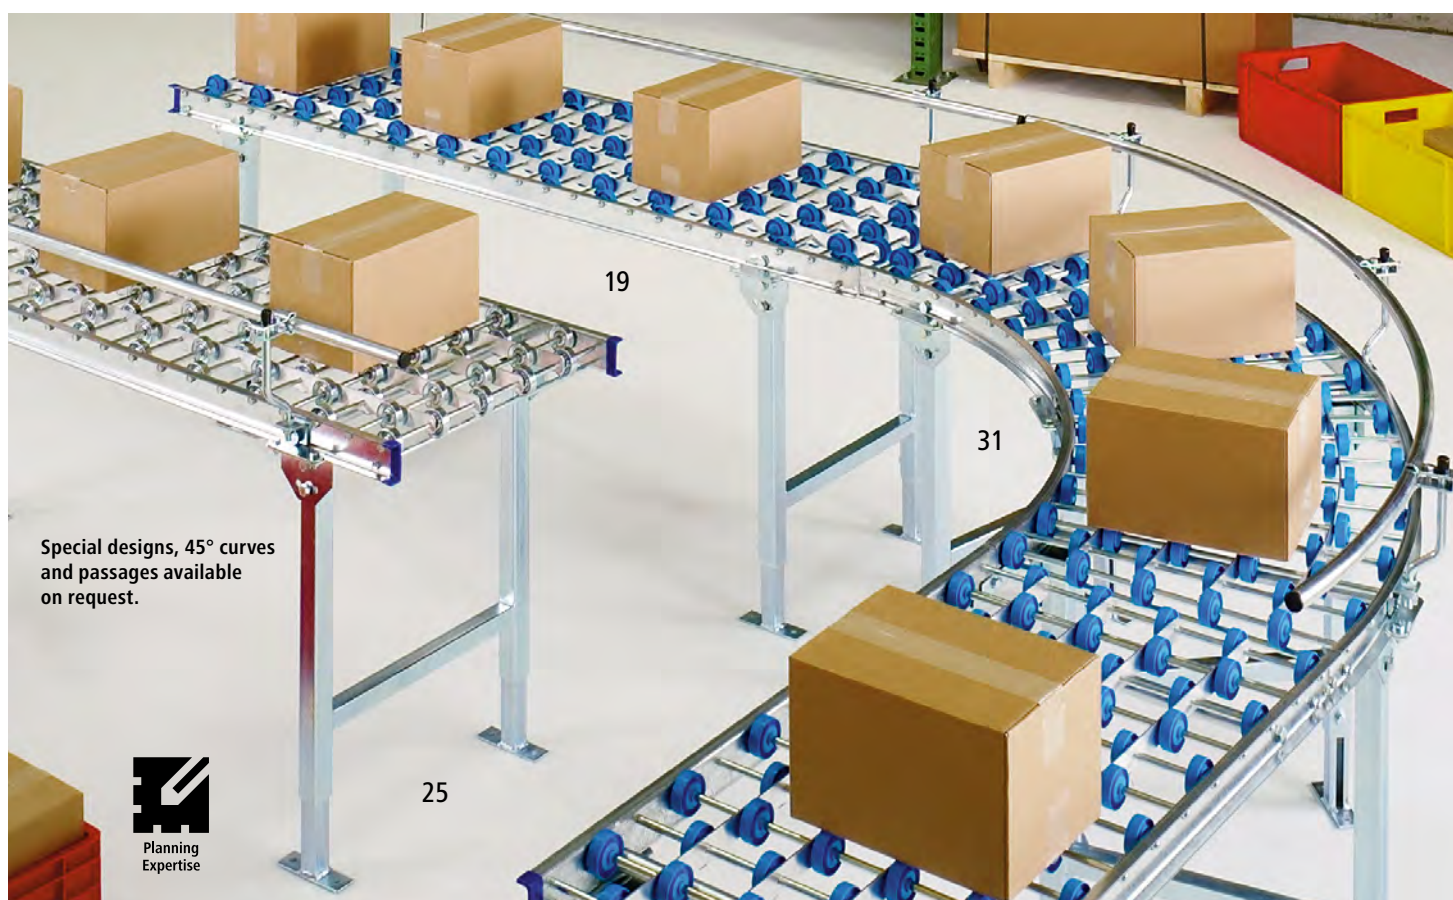

19–24 | Skate wheel conveyors

- Optimise the material flow in the company
- Modular system, making it individually adjustable
- A very low empty weight makes it suitable for flexible use

Design of frame: steel, zinc plated. Skate wheel material: steel, zinc plated. Max. load: 200 kg. Overall height: 69 mm.

		19	20	21	22	23	24
Track width	mm	300	300	300	500	500	500
Axle spacing	mm	50	75	100	50	75	100
Width of goods conveyed	mm	150 – 400	150 – 400	150 – 400	150 – 600	150 – 600	150 – 600
Length of goods conveyed	mm	150 – 1000	225 – 1000	300 – 1000	150 – 1000	225 – 1000	300 – 1000
Skate wheel arrangement		3 : 3	3 : 3	3 : 3	5 : 5	5 : 5	5 : 5
Overall width	mm	340	340	340	540	540	540
Type							
straight 1 m	Ref.	759 579 6H	759 574 6H	759 545 6H	759 594 6H	759 590 6H	759 584 6H
	€	219.00	179.00	165.00	275.00	219.00	199.00
straight 1.5 m	Ref.	759 580 6H	759 576 6H	759 547 6H	759 595 6H	759 591 6H	759 585 6H
	€	275.00	229.00	209.00	399.00	299.00	255.00
straight 2 m	Ref.	759 581 6H	759 577 6H	759 559 6H	759 596 6H	759 592 6H	759 586 6H
	€	349.00	275.00	239.00	499.00	379.00	329.00

25–30 | Light duty skate wheel conveyors, steel frame with plastic skate wheels

- Optimises the material flow in the company
- Modular system, making it individually adjustable
- A very low empty weight makes it suitable for flexible use

Design of frame: steel, zinc plated. Skate wheel material: plastic. Max. load: 200 kg. Overall height: 69 mm.

		25	26	27	28	29	30
Track width	mm	300	300	300	500	500	500
Axle spacing	mm	50	75	100	50	75	100
Width of goods conveyed	mm	150 – 400	150 – 400	150 – 400	150 – 600	150 – 600	150 – 600
Length of goods conveyed	mm	150 – 1000	225 – 1000	300 – 1000	150 – 1000	225 – 1000	300 – 1000
Skate wheel arrangement		3 : 3	3 : 3	3 : 3	5 : 5	5 : 5	5 : 5
Overall width	mm	340	340	340	540	540	540
Type							
straight 1 m	Ref.	903 480 6H	903 474 6H	903 491 6H	903 506 6H	903 501 6H	903 496 6H
	€	219.00	175.00	159.00	275.00	219.00	199.00
straight 1.5 m	Ref.	903 481 6H	903 475 6H	903 492 6H	903 508 6H	903 502 6H	903 497 6H
	€	275.00	219.00	199.00	399.00	299.00	255.00
straight 2 m	Ref.	903 482 6H	903 476 6H	903 494 6H	903 509 6H	903 503 6H	903 498 6H
	€	329.00	255.00	239.00	469.00	349.00	309.00

31–34 | ° curves

- Modular system facilitates rapid material flow
- High quality workmanship
- Ideal supplement in a conveyor system

Overall height: 69 mm. Curve: 90°. Radius of curve: 800 mm. Roller Ø: 48 mm. Design of frame: steel, zinc plated. Max. load with 1 m frame support spacing: 200 kg.

		31	32	33	34
Track width	mm	300	300	500	500
Axle spacing	mm	75	100	75	100
Overall width	mm	340	340	540	540
Length of goods conveyed	mm	225 – 1000	300 – 1000	225 – 1000	300 – 1000
Skate wheel arrangement		3 : 3	3 : 3	5 : 5	5 : 5
Width of goods conveyed	mm	150 – 400	150 – 400	150 – 600	150 – 600
Skate wheel material					
plastic	Ref.	903 479 6H	903 473 6H	903 505 6H	903 500 6H
	€	309.00	275.00	429.00	349.00
steel, zinc plated	Ref.	759 583 6H	759 573 6H	759 599 6H	759 588 6H
	€	309.00	275.00	429.00	349.00