

6–7| Eye wash bottles with sterile sodium chloride solution (saline solution)

- For rinsing out foreign particles – fast and easy to use
- Bottle with ergonomically shaped eye cup and dust cap
- Compliant with EN 15154-4 – unopened bottles have a 3 year shelf life

Cylinder capacity: saline solution. Conforms to: DIN EN 15154-4. Area of application: for rinsing out foreign particles. Pack of: 3 pcs.

6| Capacity: 200 ml. Rinsing time per bottle approx.: 2 min. Scope of delivery: 3 x 200 ml.

Ref. 111 605 6H € /pack 41.90

7| Capacity: 500 ml. Rinsing time per bottle approx.: 5 min. Scope of delivery: 3 x 500 ml.

Ref. 111 606 6H € /pack 49.90

8| Eye wash bottles with sterile phosphate buffer solution

- For neutralising acids and many alkaline substances – fast and easy to use
- Bottle with ergonomically shaped eye cup and dust cap
- Compliant with EN 15154-4 – unopened bottles have a 3 year shelf life

Capacity: 200 ml. Cylinder capacity: phosphate buffer solution. Rinsing time per bottle approx.: 2 min. Scope of delivery: 3 x 200 ml. Conforms to: DIN EN 15154-4. Area of application: for neutralising acids. Pack of: 3 pcs.

8| Ref. 111 607 6H € /pack 49.90



Video
Online!

9–10| Emergency wall boxes with eye wash bottles

- Easy and fast use for eye injuries
- Bottle with ergonomically shaped eye cup and dust cap
- Compliant with EN 15154-4 – unopened bottles have a 3 year shelf life

Conforms to: DIN EN 15154-4. Height: 270 mm. Width: 225 mm. Depth: 110 mm. Type of mounting: wall mounting.

Capacity: 700 ml. Cylinder capacity: sodium chloride solution / sterile phosphate buffer solution, pH neutral. Scope of delivery: 1 x 500 ml sodium chloride solution, 1 x 200 ml sterile phosphate buffer solution, pH-neutral. Area of application: for neutralising acids / for rinsing out foreign particles.

9| Ref. 111 608 6H € 69.90

Capacity: 1000 ml. Cylinder capacity: sodium chloride solution. Scope of delivery: 2 x 500 ml sodium chloride solution. Area of application: for rinsing out foreign particles.

10| Ref. 111 609 6H € 69.90



11–12| Hand eye showers with one spray head


- Effective first aid for foreign particles in the eye, burns, irritations, scalding etc.
- Compliant with EN 15154-1/2 and DIN 12899, including information signs, connects to an existing cold drinking water supply
- Shower heads with large area water distribution/soft jet, rubber caps around the spray heads

Height: 260 mm. Depth: 75 mm. Hose length: 1.5 m. Water flow: 6 l/min. Material: brass / plastic. Type of mounting: wall mounting. Min. pressure: 2 bar.

11| Colour: green.
Ref. 177 084 6H € 215.00

12| Colour: red.
Ref. 177 085 6H € 215.00

Max. pressure up to: 6 bar. Thread: 1/2 inch.

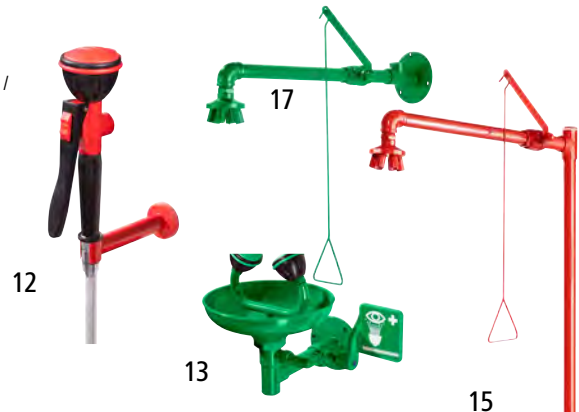

13–14| Eye showers with basin and two spray heads

- Effective first aid for foreign particles in the eye, burns, irritations, scalding etc.
- Compliant with EN 15154-1/2 and DIN 12899, including information signs, connects to an existing cold drinking water supply
- Shower heads with large area water distribution/soft jet, rubber caps around the spray heads

Height: 260 mm. Depth: 395 mm. Water flow: 12 l/min. Material: powder coated stainless steel / plastic. Type of mounting: wall mounting. Min. pressure: 2 bar.

13| Colour: green.
Ref. 177 086 6H € 359.00

14| Colour: red.
Ref. 177 087 6H € 359.00

Max. pressure up to: 6 bar. Thread: 1/2 inch.

17–18| Body emergency showers

- Effective first aid for burns, irritations, scalding etc.
- Compliant with EN 15154-1/2 and DIN 12899, including information signs, connects to an existing cold drinking water supply
- Shower heads with large area water dissipation and soft water jet

Max. pressure up to: 6 bar. Thread: 1 inch. Height: 600 mm. Depth: 685 mm. Water flow: 30 l/min. Material: powder coated stainless steel / plastic. Type of mounting: wall mounting. Min. pressure: 2 bar.

17| Colour: green.
Ref. 177 090 6H € 359.00

18| Colour: red.
Ref. 177 092 6H € 359.00

15–16| Body and eye emergency showers

- Central and effective first aid for foreign particles in the eye, burns, irritations, scalding etc.
- Compliant with EN 15154-1/2 and DIN 12899, including information signs, connects to an existing cold drinking water supply
- Shower heads with large area water distribution/soft jet, rubber caps around the spray heads

Max. pressure up to: 6 bar. Thread: 1 inch. Height: 2230 mm. Depth: 855 mm. Water flow: 30 l/min. Material: powder coated stainless steel / plastic. Type of mounting: wall mounting. Min. pressure: 4 bar.

15| Colour: green.
Ref. 177 088 6H € 919.00

16| Colour: red.
Ref. 177 089 6H € 919.00

