

## 1–2 | Professional aluminium working platforms

- Particularly robust construction
- Low weight – easy to transport
- Large working platform – plenty of space for user and materials

Platform width: 290 mm.  
Feature: folding. Access: double sided.  
Frame material: aluminium. Height folded: 110 mm. Max. load: 150 kg.

1 | Platform length: 1300 mm. Platform height: 500 mm. Overall length: 1640 mm. Overall width: 460 mm. Length folded: 1300 mm. Width folded: 450 mm. Steps incl. platform: 2 x 2 pcs. Weight: 7.9 kg. Working height: 2500 mm.

**Ref. 111 400 6H € 329.00**

2 | Platform length: 1740 mm. Platform height: 700 mm. Overall length: 2330 mm. Overall width: 700 mm. Length folded: 1740 mm. Width folded: 700 mm. Steps incl. platform: 2 x 3 pcs. Weight: 7.5 kg. Working height: 2700 mm.

**Ref. 486 100 6H € 429.00**



Ideally suited for use in industry and trade.

**15**  
Year  
Guarantee

**Intertek**  
Deutschland **Bauart**  
geprüft

**altrex**



3




Ideal for occasional use.

## 3 | Aluminium working platforms

- Comfortable work due to a large platform area
- Excellent stability due to double locking
- Easy to transport due to low inherent weight

Platform length: 725 mm. Platform width: 300 mm. Platform height: 500 mm. Feature: folding. Access: single sided. Overall length: 950 mm. Overall width: 395 mm. Overall height: 500 mm. Frame material: aluminium. Length folded: 800 mm. Width folded: 395 mm. Height folded: 145 mm. Steps incl. platform: 2 x 2. Step width: 295 mm. Material of treads: aluminium. Weight: 4.2 kg. Working height: 2500 mm. Max. load: 150 kg.

**3 | Ref. 480 440 6H € 77.90**

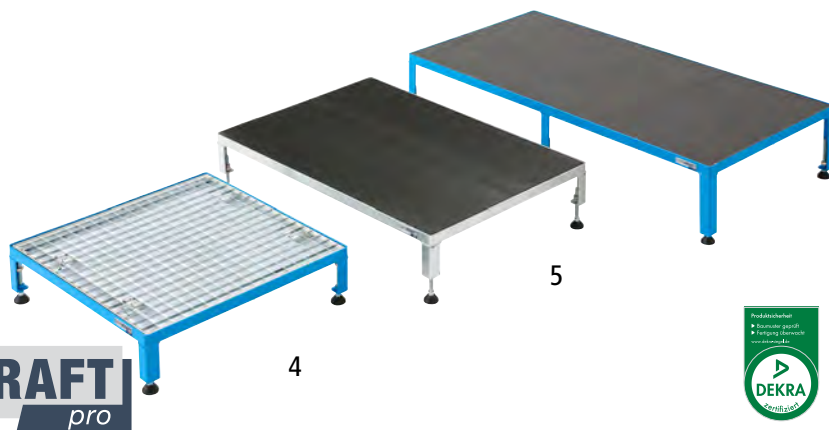

**EUROKRAFT**  
by KAISER+KRAFT **pro**



Height adjustable threaded feet

## 4–7 | Working platforms

- Sturdy and durable angled steel frame
- Easy height adjustment using threaded feet
- Optionally powder coated in light blue RAL 5012 or hot dip galvanised

Platform height: 165 – 230 mm. Frame material: steel. Platform width: 610 mm. Max. load: 150 kg.

Supplied flat pack – easy self-assembly.

	4	5	6	7
<b>Platform length</b>	610	910	1210	1510
<b>Frame colour</b>				
<b>Type</b>				
hot dip galvanised	Ref. 476 210 6H € 289.00	Ref. 476 216 6H € 389.00	Ref. 476 222 6H € 499.00	Ref. 476 228 6H € 589.00
hot dip galvanised	Ref. 476 211 6H € 289.00	Ref. 476 217 6H € 389.00	Ref. 476 223 6H € 499.00	Ref. 476 229 6H € 589.00
hot dip galvanised	Ref. 476 212 6H € 309.00	Ref. 476 218 6H € 409.00	Ref. 476 224 6H € 529.00	Ref. 476 230 6H € 629.00
light blue RAL 5012	Ref. 476 207 6H € 399.00	Ref. 476 213 6H € 499.00	Ref. 476 219 6H € 669.00	Ref. 476 225 6H € 799.00
light blue RAL 5012	Ref. 476 208 6H € 265.00	Ref. 476 214 6H € 329.00	Ref. 476 220 6H € 439.00	Ref. 476 226 6H € 539.00
light blue RAL 5012	Ref. 476 209 6H € 289.00	Ref. 476 215 6H € 359.00	Ref. 476 221 6H € 479.00	Ref. 476 227 6H € 549.00

## 8–11 | Working platforms

- Sturdy and durable angled steel frame
- Easy height adjustment using threaded feet
- Optionally powder coated in light blue RAL 5012 or hot dip galvanised

Platform height: 255 – 320 mm. Frame material: steel. Platform width: 610 mm. Max. load: 150 kg.

Supplied flat pack – easy self-assembly.

	8	9	10	11
<b>Platform length</b>	610	910	1210	1510
<b>Frame colour</b>				
<b>Type</b>				
hot dip galvanised	Ref. 476 234 6H € 439.00	Ref. 476 240 6H € 549.00	Ref. 476 246 6H € 769.00	Ref. 476 252 6H € 879.00
hot dip galvanised	Ref. 476 235 6H € 299.00	Ref. 476 241 6H € 399.00	Ref. 476 247 6H € 499.00	Ref. 476 253 6H € 599.00
hot dip galvanised	Ref. 476 236 6H € 319.00	Ref. 476 242 6H € 419.00	Ref. 476 248 6H € 549.00	Ref. 476 254 6H € 639.00
light blue RAL 5012	Ref. 476 231 6H € 409.00	Ref. 476 237 6H € 499.00	Ref. 476 243 6H € 699.00	Ref. 476 249 6H € 799.00
light blue RAL 5012	Ref. 476 232 6H € 275.00	Ref. 476 238 6H € 359.00	Ref. 476 244 6H € 479.00	Ref. 476 250 6H € 549.00
light blue RAL 5012	Ref. 476 233 6H € 299.00	Ref. 476 239 6H € 389.00	Ref. 476 245 6H € 499.00	Ref. 476 251 6H € 599.00