

Lifting equipment

Pallet trucks

from page 102

Stackers and mini-lifters

Pages 111 - 119

Stacker accessories

Page 120

Working platforms

Page 121

Lifting platform trolleys

from page 122

Lifting tables

from page 131

Bridge plates

Page 136

Strip curtains


Page 137




Application guide

Single fork rollers for quiet running and offer increased manoeuvrability.

Tandem fork rollers for uneven flooring.



Suitable for EURO pallets

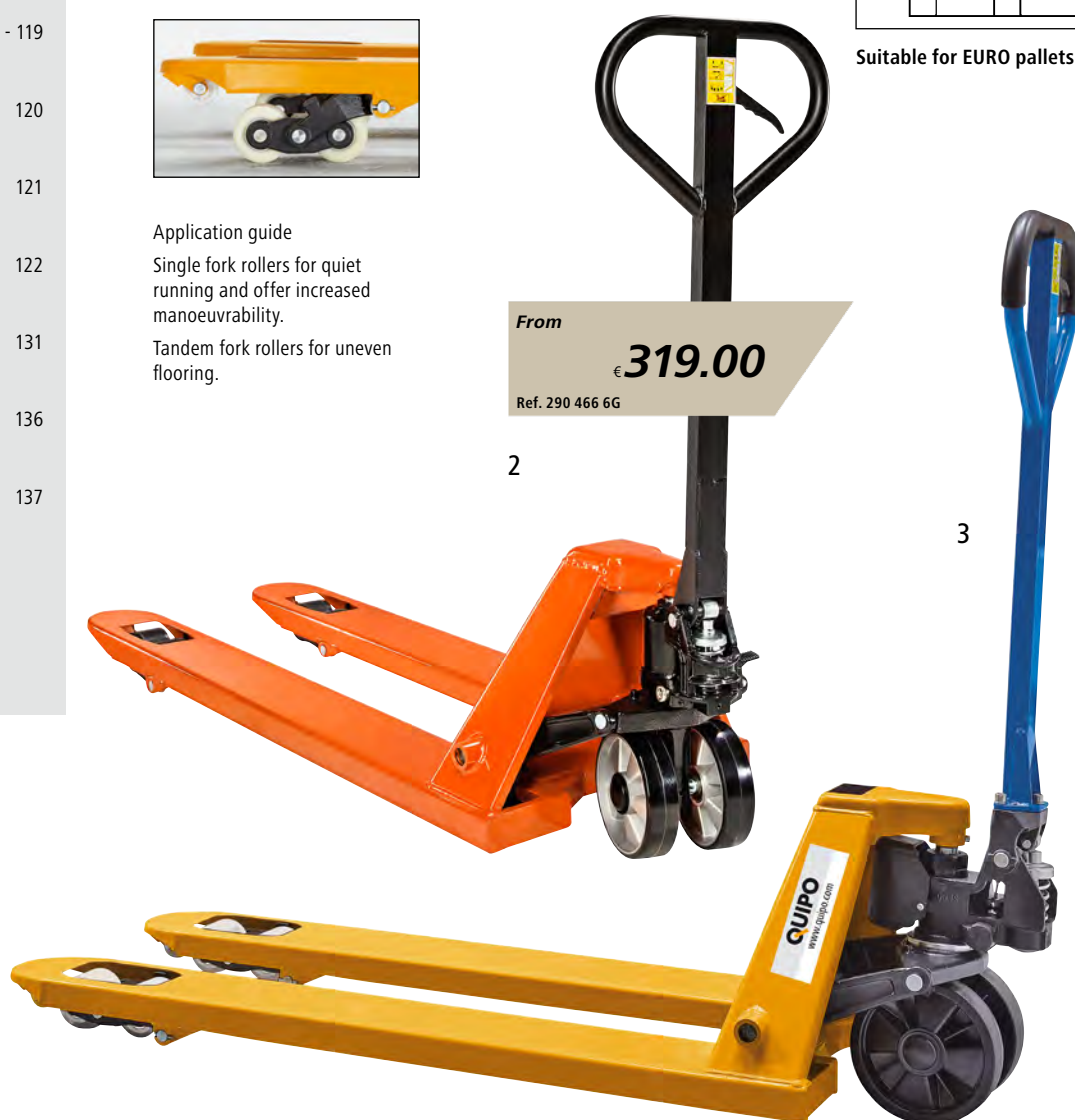

EUROKRAFT
by KAISER+KRAFT

basic

1 – 2 | Standard pallet trucks

- Polyurethane steering wheels, nylon fork rollers
- Entry rollers for entering pallets from the side

Max. load: 2500 kg. Lifting range: 85 – 200 mm. Length: 1533 mm. Height: 1220 mm. Fork length: 1150 mm. Fork width: 160 mm. Distance across forks: 550 mm. Steering radius: 190 °. Weight: 62.5 kg. Steering wheel material: polyurethane. Fork roller material: nylon. Steering wheel diameter: 180 mm. Fork roller diameter: 80 mm. Material: steel. Colour: pure orange RAL 2004. Finish: powder coated. Fittings: entry rollers. Feature: manual / mobile.

		1	2
Fork roller version		single	tandem
Fork roller width	mm	93	70
Minimum order quantity			
1 pcs.	Ref.	176 289 6G	176 288 6G
	€	339.00	339.00
3 pcs.	Ref.	290 466 6G	290 465 6G
	€	319.00	319.00

QUIPO

★★★

3 – 5 | Pallet trucks

- For intensive use
- Rubber coated drawbar handle
- Entry rollers for entering pallets from the side

Max. load: 2500 kg. Lifting range: 85 – 200 mm. Fork length: 1150 mm. Fork width: 160 mm. Distance across forks: 540 mm. Weight: 76 kg. Steering wheel diameter: 200 mm. Fork roller version: tandem. Fork roller diameter: 80 mm. Material: steel. Colour: melon yellow RAL 1028. Finish: powder coated. Feature: manual / mobile.

	3	4	5
Steering wheel material	solid rubber	solid rubber	polyurethane
Fork roller material	nylon	polyurethane	polyurethane
Fittings		entry rollers	entry rollers
	Ref.	520 028 6G	520 029 6G
	€	429.00	429.00
			520 030 6G
			429.00