



1–5| Mini-lifters 85 and 120

- Manoeuvrable and powerful lifting devices – versatile for every possible use
- Removable platform as standard
- Compliant with European pallet truck safety standards EN 1757-1

castors with wheel stop. Castor diameter front / rear: 60 / 100 mm. Conforms to: EN 1757-1. Platform width: 498 mm. Platform length: 440 mm.

Load centre: 220 mm. Overall length: 771 mm. Overall width: 498 mm. Clearance height: 91 mm. Material: steel. Feature: electric. Finish: powder coated. Colour: sky blue RAL 5015. Fittings: battery. Battery: 2 x 12 V / 7.2 Ah. Battery charger: 100 – 240 V / 1 A. Wheel fittings: 4 swivel


Available on request

Other max. loads, lifting heights, ESD wheel fittings, custom made accessories and much more.



More products online!

		1	2	3	4	5
Max. load	kg	85	85	85	120	120
Lifting range	mm	127 – 1319	127 – 1569	127 – 1819	127 – 1569	127 – 1819
Overall height	mm	1682	1932	2182	1932	2182
Weight	kg	40.5	41.6	43.1	43.1	45
	Ref.	176 994 6G	176 997 6G	176 998 6G	176 995 6G	176 996 6G
	€	3390.00	3590.00	3790.00	4990.00	5200.00



Professional tip

Avoid back injuries, avoid pain and treatment costs due to subjecting your body to too much musculoskeletal strain. The maximum load diagram for persons demonstrates that lifting devices are an essential item.

Maximum load diagram



6| Roller platforms

Length: 470 mm. Width: 600 mm.

6| Ref. 177 003 6G € 2190.00



7| Roller platforms

Length: 470 mm. Width: 600 mm.


7| Ref. 177 004 6G € 2190.00



8| Manual turning roller

Max. load: 40 kg. Diameter: 76 mm.

8| Ref. 177 005 6G € 2190.00

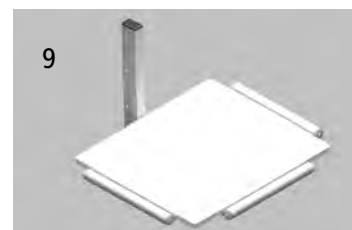

9| Platforms

Length: 480 mm. Width: 640 mm.

Roll length from – to: 300 mm.

Diameter: 30 mm.

9| Ref. 177 002 6G € 859.00