

## 10 – 17 | Multi-lifters

- Load centre at 600/500 mm
- No tools required to exchange accessories
- Fully compliant with EN 1757-1


Overall width: 570 mm. Overall height: 2000 mm. Spindle lift height: 1385 mm. Feature: electric. Fittings: battery. Battery: 2 x 12 V / 20 Ah. Battery charger: 100 – 240 V / 4 A. Steering wheel material: polyurethane. Steering wheel diameter: 125 mm. Conforms to: EN 1757-1. Lifting range with optional platform: 120 – 1505 mm.




Video  
Online!

10

Multi-lifter steel 300 with optional turning roller (on request), fork rollers

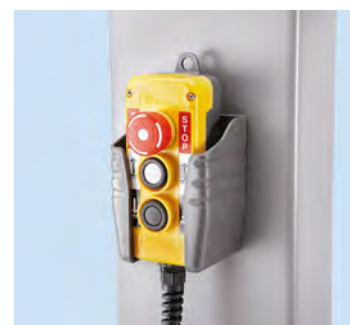

Removable control unit

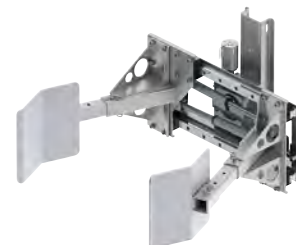

Electric drum grip on request

### Modular construction

#### Can be expanded as required

- Lifting heights up to 2600 mm
- Chassis can be widened, shortened and extended
- Swivel castors with Ø 60 mm for chassis height 90 mm (up to max. load of 150 kg)
- Electrical equipment can be adapted
- Custom made accessories

Please ask for details.

More products online!

	10	11	12	13	14	15	16	17
Max. load	150	150	300	300	150	150	300	300
Load centre	600	600	500	500	600	600	500	500
Overall length	1050	1050	1150	1150	1050	1050	1150	1150
Clearance height	90	140	90	140	90	140	90	140
Lowered height	90	140	90	140	90	140	90	140
Material	steel	steel	steel	steel	stainless steel	stainless steel	stainless steel	stainless steel
Finish	powder coated	powder coated	powder coated	powder coated				
Colour	signal blue RAL 5005 white aluminium RAL 9006	signal blue RAL 5005 white aluminium RAL 9006	signal blue RAL 5005 white aluminium RAL 9006	signal blue RAL 5005 white aluminium RAL 9006	aluminium silver	aluminium silver	aluminium silver	aluminium silver
Protection type	IP41 / IP67	IP41 / IP67	IP41 / IP67	IP41 / IP67	IP66	IP66	IP66	IP66
Wheel fittings	2 steering wheels with double stops, 2 fork rollers	4 steering wheels, 2 with double stops	2 steering wheels with double stops, 2 fork rollers	4 steering wheels, 2 with double stops	2 steering wheels with double stops, 2 fork rollers	4 steering wheels, 2 with double stops	2 steering wheels with double stops, 2 fork rollers	4 steering wheels, 2 with double stops
Fork roller material	polyurethane	nylon	polyurethane	nylon	polyurethane	nylon	polyurethane	nylon
Ref.	520 056 6G	520 057 6G	520 058 6G	520 059 6G	520 062 6G	520 064 6G	520 060 6G	520 061 6G
€	5100.00	5100.00	5200.00	5200.00	6600.00	6600.00	6900.00	7000.00

18



### 18 | Stainless steel/plastic platforms

Material: plastic. Length: 600 mm. Width: 500 mm. Max. load: 300 kg.  
18 | Ref. 520 069 6G € 729.00


19



### 19 | Roller forks

Length: 600 mm. Distance across forks: 300 mm. Max. load: 300 kg. Diameter: 60 mm.  
19 | Ref. 520 071 6G € 879.00


20



### 20 | Spikes

Length: 650 mm. Max. load: 300 kg. Diameter: 60 mm.  
20 | Ref. 520 070 6G € 429.00

21



### 21 | Pallet forks

Length: 750 mm. Distance across forks: 590 mm. Fork width: 90 mm. Max. load: 300 kg.  
21 | Ref. 520 072 6G € 1075.00

Free delivery when your order is over €200.

SALES PHONE 1800 677 300 (local rate)

KAISER+KRAFT