

BLUE electric chain hoists

Optionally available with hook suspension, push trolley or electric drive trolley

- Quality product made in Germany
- Fast and easy commissioning
- Chain hoist and chassis certified according to IP55 (dust and splash water protected)

Ergonomic design and freely positionable control circuit, two additional lifting speeds available. High quality powder coating for optimal protection from external influences.

High level of safety due to friction clutch with automatic shutdown function by monitoring the speed. Can be used at temperature fluctuations between -20 °C and +45 °C.

Slack chain box included as standard.

Motor: 380 – 415 V / 50 Hz

Contact control: 24 V


Control cable length: 0.8 – 2.8 m

FEM hoist classification: FEM 3 m = 3200 hours, FEM 2 m = 1600 hours

All advantages at a glance

- High level of safety
- Long service life
- Minimal load swing
- Efficient, high power motor
- Ergonomic handling
- Stepless operability
- Low noise development
- Reliable temperature range

NEW

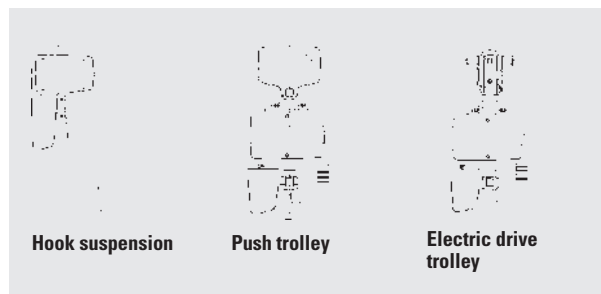

More electric chain hoists **ONLINE!**

Max. load	kg	125	250	500	1000	2000	
FEM group		3 m	2 m	2 m	2 m	2 m	
Number of strands		1	1	1	1	2	
Lifting speed of main lift / precise lift	m/min	8 / 2	6 / 1.5	4.5 / 1.1	4 / 1	4 / 1	
Lifting motor power main lift / precise lift	kW	0.18 / 0.05	0.37 / 0.1	0.56 / 0.14	1.1 / 0.27	2.3 / 0.57	
Starting time ST main lift / precise lift	%	40 / 20	40 / 20	40 / 20	40 / 20	40 / 20	
with hook suspension	Overall height (B)	mm	364	364	416	505	597
	Hook travel	m	4	4	4	4	4
	Ref.	478 652-2G	478 653-2G	478 654-2G	478 655-2G	478 656-2G	
	€	1.475,-	1.545,-	1.675,-	2.150,-	2.990,-	
	Hook travel	m	5	5	5	5	5
	Ref.	478 657-2G	478 658-2G	478 659-2G	478 661-2G	478 662-2G	
	€	1.545,-	1.595,-	1.775,-	2.190,-	3.150,-	
with push trolley	Overall height (C)	mm	416	416	468	557	569
	Flange width from – to	mm	58 – 200	58 – 200	58 – 200	58 – 200	74 – 200
	Ref.	478 663-2G	478 664-2G	478 665-2G	478 666-2G	478 667-2G	
	€	1.725,-	1.775,-	1.925,-	2.390,-	3.250,-	
with electric drive trolley	Overall height (C)	mm	416	416	468	557	569
	Flange width from – to	mm	58 – 200	58 – 200	58 – 200	58 – 200	74 – 200
	Ref.	478 668-2G	478 669-2G	478 670-2G	478 671-2G	478 672-2G	
	€	2.850,-	2.890,-	3.050,-	3.450,-	4.290,-	

Crane forks


- With automatic balancing
- Effective height can be individually adapted to the transported goods
- Load securing mechanism for attachment included

Suitable for flexible use on construction sites. Can hold Euro pallets either lengthwise or crosswise, the fork is automatically adjusted to the load centre by means of carriage and spring.

Other features:

- Minimum load 20 – 25% of nominal load
- Forks laterally adjustable
- Steel shot blasted

NEW

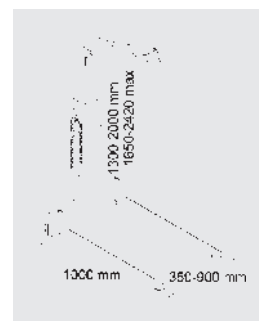

Max. load	kg	1000	1500	2000	3000
Overall height from – to	mm	1650 – 2350	1650 – 2350	1655 – 2355	1720 – 2420
Fork cross section	mm	100 x 30	100 x 35	120 x 40	125 x 45
Fork adjustment range	mm	350 – 900	350 – 900	400 – 900	450 – 900
Ref.		453 670-2G	453 671-2G	453 672-2G	453 673-2G
€		959,-	1.075,-	1.395,-	1.495,-

YELLOW = 7 working days

FREE DELIVERY
SALES FAX: 1 800 677 301 (local rate)

KAISER + KRAFT
EVERYTHING FOR THE BUSINESS.