


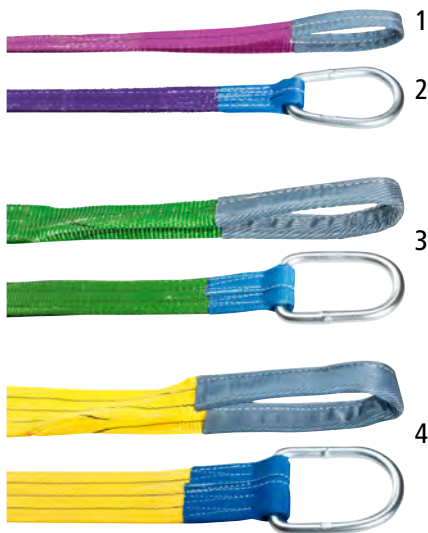

Pack of 2.

You can't find the right length? Additional sizes with 1 m more effective length available on request.

1–4 | Lifting straps

- Hardwearing polyester fabric, EN 1492-1 compliant, impregnated with polyurethane
- Sewn-in heavy duty strip for a better grip
- Max. load imprint for fast distinction

Thickness: 7 mm. Material: polyester fabric with PU treatment. Temperature resistance: –40 °C to +100 °C. Pack of: 2.

		1	2	3	4
Max. load single, direct	kg	1000	1000	2000	3000
Max. load single, choker	kg	800	800	1600	2400
Max. load double basket	kg	2000	2000	4000	6000
Width	mm	50	30	60	90
Colour code		violet	violet	green	yellow
Type of mounting	Length				
with 2 clips for combined use	1 m	Ref. 176 374 6G € / pack 149.00		176 377 6G 195.00	
with 2 clips for combined use	2 m	Ref. 176 375 6G € / pack 159.00		176 378 6G 215.00	176 380 6G 319.00
with 2 clips for combined use	3 m	Ref. 176 376 6G € / pack 175.00		176 379 6G 255.00	176 381 6G 339.00
with 2 reinforced loops	2 m	Ref. € / pack	176 416 6G 32.90	176 420 6G 49.90	176 423 6G 87.90
with 2 reinforced loops	3 m	Ref. € / pack	176 417 6G 37.90	176 421 6G 59.90	176 424 6G 94.90
with 2 reinforced loops	4 m	Ref. € / pack	176 418 6G 41.90	176 422 6G 84.90	176 425 6G 139.00

5–9 | Round slings

- Made of polyester with a hardwearing protective sleeve and sewn-in heavy duty strips for a better grip
- Max. load imprint for easy distinction
- Temperature resistant from –40 °C to +100 °C

Material: polyester fabric with PU treatment. Type of mounting: as round slings. Temperature resistance: –40 °C to +100 °C. Pack of: 2.



Pack of 2.

		5	6	7	8	9
Max. load single, direct	kg	1000	2000	3000	4000	5000
Max. load single, choker	kg	800	1600	2400	3200	4000
Max. load double basket	kg	2000	4000	6000	8000	10000
Supporting surface under loading	mm	37	44	57	65	80
Colour code		violet	green	yellow	grey	red
Effective length						
1000 mm	Ref. € / pack	176 382 6G 16.95	176 387 6G 23.90	176 393 6G 30.90	176 399 6G 46.90	176 434 6G 39.90
1500 mm	Ref. € / pack	176 383 6G 20.90	176 388 6G 28.90	176 394 6G 38.90	176 401 6G 49.90	176 405 6G 52.90
2000 mm	Ref. € / pack	176 384 6G 24.90	176 390 6G 32.90	176 395 6G 46.90	176 402 6G 59.90	176 406 6G 59.90
3000 mm	Ref. € / pack	176 385 6G 35.90	176 391 6G 38.90	176 396 6G 59.90	176 403 6G 72.90	176 407 6G 82.90
4000 mm	Ref. € / pack	176 386 6G 42.90	176 392 6G 49.90	176 398 6G 69.90	176 404 6G 92.90	176 408 6G 104.90
5000 mm	Ref. € / pack	176 426 6G 49.90	176 428 6G 59.90	176 429 6G 84.90	176 430 6G 104.90	176 431 6G 139.00



10



Available in most RAL colours. Only 10% extra.

10–13 | Lifting sling racks

- Infinite height adjustment of the cross beams
- 12 electrolytically zinc plated hooks incl. mounting kit

Colour: melon yellow RAL 1028. Width: 908 mm. Max. load: 1000 kg.

Type: mobile. Wheel fittings: 2 swivel castors with stops, 2 fixed castors. Wheel Ø: 150 mm. Wheel bearing: plain bearing.

10 | Height: 1970 mm. Length: 1900 mm. Weight: 89 kg.

Ref. 483 802 6G € 1045.00

11 | Height: 1866 mm. Length: 2500 mm. Weight: 99 kg.

Ref. 483 804 6G € 1245.00

Type: stationary.

12 | Height: 1970 mm. Length: 1900 mm. Weight: 85 kg.

Ref. 483 803 6G € 979.00

13 | Height: 1866 mm. Length: 2500 mm. Weight: 95 kg.

Ref. 483 805 6G € 1095.00