



Fully elastic tyres



- On plastic rim
- For uneven and rough floor surfaces
- Extremely hardwearing
- Hardness 70 Shore A
- Temperature resistant from -5 °C to +60 °C

Wheel Ø x width	mm	80 x 35	100 x 36	125 x 36	160 x 50	200 x 50
Max. load at 4 km/h	kg	100	125	150	300	400
Overall height	mm	100	125	155	190	235
Plate dimensions		105 x 85	105 x 85	105 x 85	135 x 110	135 x 110
Screw hole spacing		80 x 60	80 x 60	80 x 60	105 x 80 / 75	105 x 80 / 75
Screw hole diameter	mm	9	9	9	11	11
Hub length / bore	mm	40 / 12	40 / 12	49 / 15	60 / 20	60 / 20
1 swivel castor	Offset	mm	33	35	36	55
	Ref.	604 334-2G	604 338-2G	604 342-2G	604 346-2G	604 351-2G
	€	9,19	10,49	16,49	19,49	31,90
2 swivel castor with double stop	Offset	mm	33	35	36	55
	Ref.	604 335-2G	604 339-2G	604 343-2G	604 347-2G	604 352-2G
	€	14,49	17,49	20,90	26,90	35,90
3 fixed castor		Ref.	604 336-2G	604 340-2G	604 344-2G	604 349-2G
	€	6,99	8,19	14,49	20,90	34,90
Wheels		Ref.	604 337-2G	604 341-2G	604 345-2G	604 354-2G
	€	5,99	5,99	8,19	16,49	24,90
Set offers						
Set 1	2 swivel castors, 2 swivel castors with double stops	Ref.	604 355-2G	604 357-2G	604 358-2G	
		€	47,90	47,90	64,90	
Set 2	2 swivel castors with double stops, 2 fixed castors	Ref.	604 359-2G	604 360-2G	604 361-2G	
		€	36,90	42,90	57,90	

Sheet steel housing, zinc plated, swivel bearing with double ball race, swivel bearing protection. **Ball bearings.**

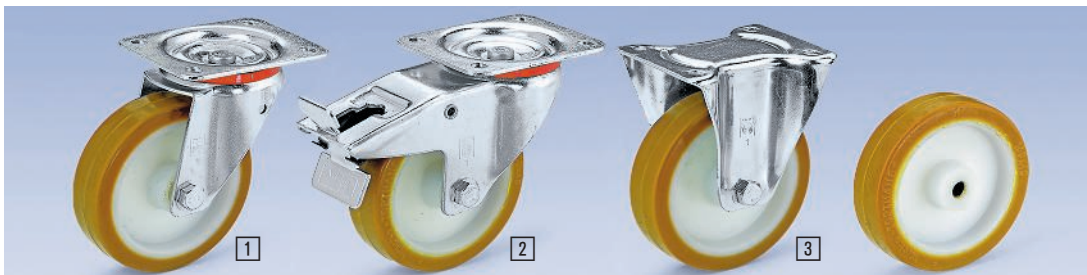

Particularly cost effective when purchased as a set.



Wheel Ø x width	mm	100 x 35	100 x 35	125 x 38	125 x 38	150 x 38	200 x 48
Max. load at 4 km/h	kg	150	150	180	200	300	350
Overall height	mm	125	128	155	155	185	235
Screw hole spacing	mm	80 x 60 - 76	105 x 75 - 80	80 x 60 - 76	105 x 75 - 80	105 x 75 - 80	105 x 75 - 80
Screw hole diameter	mm	9	11	9	11	11	11
Hub length / bore	mm	40 / 12	40 / 12	40 / 12	40 / 12	50 / 15	60 / 20
plain bearing 1 swivel castor	Offset	mm	38	45	38	48	52
	Plate dimensions	mm	105 x 80	135 x 110	105 x 80	135 x 110	135 x 110
	Ref.	911 006-2G	702 714-2G	911 017-2G	702 757-2G	702 803-2G	702 854-2G
	€	23,90	35,90	37,90	34,90	36,90	54,90
2 swivel castor with double stop	Offset	mm	38	45	38	48	52
	Plate dimensions	mm	105 x 80	135 x 110	105 x 80	135 x 110	135 x 110
	Ref.	911 008-2G	799 696-2G	911 019-2G	799 718-2G	799 726-2G	799 734-2G
	€	42,90	37,90	36,90	40,90	59,90	67,90
3 fixed castor	Plate dimensions	mm	102 x 87	135 x 114	102 x 87	135 x 114	135 x 114
	Ref.	911 010-2G	702 722-2G	911 022-2G	702 765-2G	702 811-2G	702 862-2G
	€	19,49	30,90	29,90	30,90	31,90	47,90
Wheels		Ref.	702 730-2G	702 730-2G	702 773-2G	702 773-2G	702 838-2G
	€	19,49	19,49	23,90	23,90	24,90	40,90
roller bearing 1 swivel castor	Offset	mm	38	45	38	48	52
	Plate dimensions	mm	105 x 80	135 x 110	105 x 80	135 x 110	135 x 110
	Ref.	911 007-2G	911 014-2G	911 018-2G	911 025-2G	911 028-2G	
	€	26,90	28,90	28,90	29,90	34,90	
2 swivel castor with double stop	Offset	mm	38	45	38	48	52
	Plate dimensions	mm	105 x 80	135 x 110	105 x 80	135 x 110	135 x 110
	Ref.	911 009-2G	911 015-2G	911 021-2G	911 026-2G	911 029-2G	
	€	38,90	40,90	39,90	40,90	54,90	
3 fixed castor	Plate dimensions	mm	102 x 87	135 x 114	102 x 87	135 x 114	135 x 114
	Ref.	911 012-2G	911 016-2G	911 023-2G	911 027-2G	911 030-2G	
	€	21,90	23,90	29,90	24,90	30,90	
Wheels		Ref.	911 013-2G	911 013-2G	911 024-2G	911 024-2G	911 031-2G
	€	20,90	20,90	28,90	28,90	34,90	

Polyurethane tyres




On nylon rim

- Extremely durable for high performance, low rolling resistance
- Largely resistant against many thinned oils, greases, and chemicals
- Hardness 92 Shore A
- Temperature resistant from -5 °C to +80 °C

Sheet steel housing, zinc plated, swivel bearing with double ball race, swivel bearing protection.

Optionally available with plain bearings or roller bearings.



BLUE = 14 working days