



### Polyurethane tyres



#### On nylon rim

- Extremely durable for high performance, low rolling resistance
- Largely resistant against many thinned oils, greases, and chemicals
- Hardness Shore D40
- Temperature resistant from -40 °C to +80 °C

Sheet steel housing, yellow chromated, swivel bearing with double ball race, swivel bearing protection. **Roller bearings.**



Non-marking




Low rolling resistance

Wheel Ø x width	mm	80 x 32	100 x 32	125 x 32	160 x 40	200 x 46
Max. load at 4 km/h	kg	100	150	200	350	350
Overall height	mm	108	128	155	200	240
Screw hole spacing	mm	60 x 77 - 80	60 x 77 - 80	60 x 77 - 80	105 x 75 - 80	105 x 75 - 80
Screw hole diameter	mm	9	9	9	11	11
Hub length / bore	mm	44.4 / 12	44.4 / 12	44.4 / 12	58 / 20	58 / 20
<b>1</b> swivel castor	Offset	mm	44.5	41	40	55
	Plate dimensions	mm	105 x 85	105 x 85	105 x 85	137 x 105
	Ref.		918 650-2G	918 655-2G	918 659-2G	918 664-2G
	€		14,49	14,49	17,49	34,90
<b>2</b> swivel castor with double stop	Offset	mm	44.5	41	40	55
	Plate dimensions	mm	105 x 85	105 x 85	105 x 85	137 x 105
	Ref.		918 651-2G	918 656-2G	918 661-2G	918 669-2G
	€		19,49	19,49	21,90	52,90
<b>3</b> fixed castor	Plate dimensions	mm	103 x 85	103 x 85	103 x 85	137 x 115
	Ref.		918 653-2G	918 657-2G	918 662-2G	918 666-2G
	€		10,49	11,95	14,49	30,90
<b>Wheels</b>	Ref.		918 654-2G	918 658-2G	918 663-2G	918 667-2G
	€		5,99	8,19	10,49	19,49
<b>Set offers</b>						
<b>Set 1</b>	2 swivel castors, 2 swivel castors with double stops	Ref.	985 957-2G	985 959-2G	985 962-2G	
		€	57,90	52,90	57,90	
<b>Set 2</b>	2 swivel castors with double stops, 2 fixed castors	Ref.	985 958-2G	985 960-2G	985 963-2G	
		€	57,90	47,90	52,90	

Particularly cost effective when purchased as a set.



Set 2

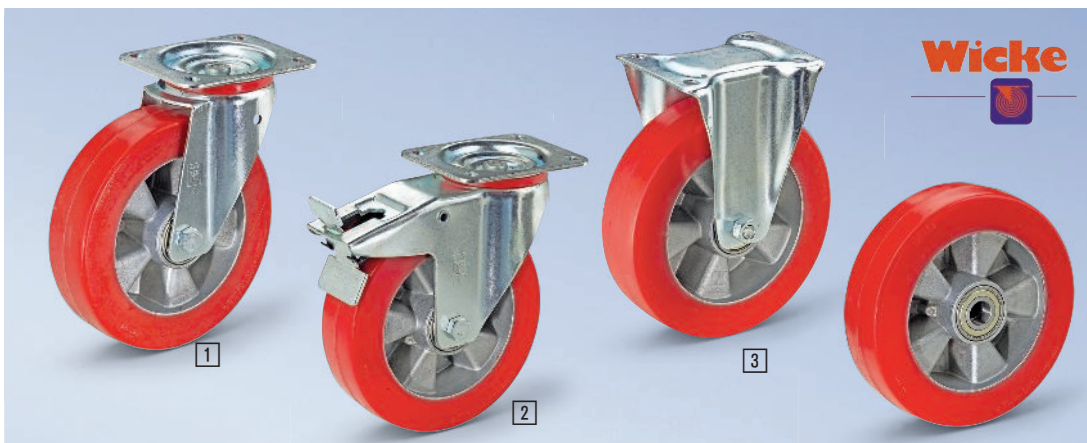

### Polyurethane tyres



- On aluminium rims
- Non-marking due to special composition
- Hardwearing and cut resistant
- Hardness 75 Shore A
- Temperature resistant from -5 °C to +80 °C

Zinc plated sheet steel housing, swivel bearing with double ball race, swivel bearing protection. **Ball bearings.**

Wheel Ø 100 – 125 mm on spoke rim (not shown), wheel Ø 160 – 200 mm on honeycomb rim (as shown).



Non-marking



Hardwearing



Cut resistant

Wheel Ø x width	mm	100 x 40	100 x 40	125 x 40	125 x 40	160 x 50	200 x 50
Max. load at 4 km/h	kg	200	250	200	280	300	300
Overall height	mm	125	128	155	155	190	235
Screw hole spacing	mm	80 x 60 - 76	105 x 75 - 80	80 x 60 - 76	105 x 75 - 80	105 x 75 - 80	105 x 75 - 80
Screw hole diameter	mm	9	11	9	11	11	11
Hub length / bore	mm	40 / 12	40 / 12	50 / 20	50 / 20	60 / 20	60 / 20
<b>1</b> swivel castor	Offset	mm	38	45	38	48	52
	Plate dimensions	mm	105 x 80	135 x 110	105 x 80	135 x 110	135 x 110
	Ref.		760 522-2G	760 523-2G	760 524-2G	760 525-2G	760 526-2G
	€		29,90	31,90	52,90	54,90	67,90
<b>2</b> swivel castor with double stop	Offset	mm	38	45	38	48	52
	Plate dimensions	mm	105 x 80	135 x 110	105 x 80	135 x 110	135 x 110
	Ref.		760 529-2G	760 530-2G	760 531-2G	760 532-2G	760 533-2G
	€		34,90	39,90	57,90	62,90	64,90
<b>3</b> fixed castor	Plate dimensions	mm	102 x 87	135 x 114	102 x 87	135 x 114	135 x 114
	Ref.		760 535-2G	760 537-2G	760 538-2G	760 539-2G	760 541-2G
	€		26,90	31,90	52,90	52,90	64,90
<b>Wheels</b>	Ref.		760 542-2G	760 542-2G	760 545-2G	760 545-2G	760 548-2G
	€		21,90	21,90	40,90	40,90	42,90

www.kaiserkraft.ie

K1160

Please enter reference number for detailed information

BLUE = 14 working days