

1–5 | Cantilever arms

- With cold rolled sheet steel
- With welded, U-shaped, plug-on feet
- Quick and easy self-assembly

Material: steel, plastic coated. Design of cantilever shelving: heavy duty.
Design of cantilever arm: without anti-roll device.

		1	2	3	4	5
Cantilever arm length	mm	500	750	1000	1250	1500
Max. cantilever arm load	kg	400	500	500	500	500
Colour						
gentian blue	Ref.	911 957 6G	911 959 6G	911 961 6G	911 963 6G	911 965 6G
RAL 5010	€	31.90	40.90	59.90	62.90	74.90
light grey	Ref.	911 956 6G	911 958 6G	911 960 6G	911 962 6G	911 964 6G
RAL 7035	€	31.90	40.90	59.90	62.90	74.90
reseda green	Ref.	449 920 6G	449 938 6G	449 954 6G	706 164 6G	706 165 6G
RAL 6011	€	31.90	40.90	59.90	62.90	74.90

6–9 | End stops

Type: for booms. Material: steel, plastic coated.

Colour: zinc plated. Design: plug in.

6 | Ref. 449 911 6G € 12.49


**7 | Colour: gentian blue RAL 5010.
Ref. 911 971 6G € 9.49**

8 | Colour: light grey RAL 7035.

Ref. 911 972 6G € 9.49

9 | Colour: reseda green RAL 6011.

Ref. 449 903 6G € 9.49

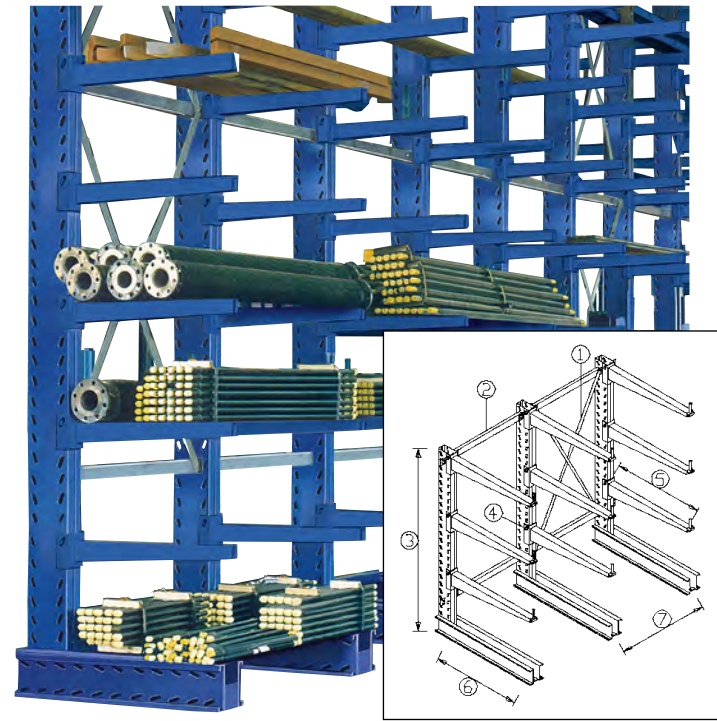

Max. load per section of a system: arm load capacity x number of cantilever arms on the same level.

Max. bay load: max. upright load x number of uprights.

All specified max. loads apply with uniform load distribution.

10–12 | Cantilever racking uprights, single sided

- Individual components for individual requirements
- Made of high quality, cold rolled U-steel profile
- Height-adjustable assembly of cantilever arms in 100 mm increments without using tools

Material: steel, plastic coated. Design: welded. Design of cantilever shelving: heavy duty. Adjustment grid: 100 mm. Design of stands: single sided. Width of upright profile: 100 mm. Depth of upright profile: 175 mm.

			10	11	12
Colour			gentian blue RAL 5010	light grey RAL 7035	reseda green RAL 6011
Max. load	Upright height	Upright foot length			
1050 kg	3500 mm	1500 mm	Ref. 911 921 6G € 285.00	911 920 6G 285.00	706 182 6G 285.00
1200 kg	2500 mm	1500 mm	Ref. 911 899 6G € 215.00	911 898 6G 215.00	706 171 6G 215.00
1200 kg	3000 mm	1500 mm	Ref. 911 910 6G € 249.00	911 908 6G 249.00	706 177 6G 249.00
1280 kg	3500 mm	1250 mm	Ref. 911 919 6G € 245.00	911 918 6G 245.00	706 181 6G 245.00
1450 kg	2500 mm	1250 mm	Ref. 911 897 6G € 195.00	911 896 6G 195.00	706 170 6G 195.00
1450 kg	3000 mm	1250 mm	Ref. 911 907 6G € 215.00	911 906 6G 215.00	706 176 6G 215.00
1550 kg	3500 mm	1000 mm	Ref. 911 916 6G € 219.00	911 915 6G 219.00	706 180 6G 219.00
1720 kg	3000 mm	1000 mm	Ref. 911 905 6G € 209.00	911 904 6G 209.00	706 174 6G 209.00
1730 kg	2500 mm	1000 mm	Ref. 911 894 6G € 189.00	911 893 6G 189.00	706 169 6G 189.00
1960 kg	3500 mm	750 mm	Ref. 911 914 6G € 209.00	911 913 6G 209.00	706 179 6G 209.00
2130 kg	3000 mm	750 mm	Ref. 911 903 6G € 189.00	911 902 6G 189.00	706 173 6G 189.00
2150 kg	2500 mm	750 mm	Ref. 911 892 6G € 175.00	911 891 6G 175.00	706 168 6G 175.00
2670 kg	3500 mm	500 mm	Ref. 911 912 6G € 195.00	911 911 6G 195.00	706 178 6G 195.00
2790 kg	3000 mm	500 mm	Ref. 911 901 6G € 175.00	911 900 6G 175.00	706 172 6G 175.00
2820 kg	2500 mm	500 mm	Ref. 911 890 6G € 165.00	911 889 6G 165.00	706 166 6G 165.00

13–15 | Cantilever racking uprights, single sided

- Individual components for individual requirements
- Made of high-quality, cold rolled U-steel profile
- Height-adjustable assembly of cantilever arms in 100 mm increments without using tools

Material: steel, plastic coated. Design: welded. Design of cantilever shelving: super heavy-duty. Adjustment grid: 100 mm. Design of stands: single sided. Width of upright profile: 100 mm. Depth of upright profile: 200 mm.

			13	14	15
Colour			gentian blue RAL 5010	light grey RAL 7035	reseda green RAL 6011
Max. load	Upright height	Upright foot length			
1740 kg	3500 mm	1500 mm	Ref. 911 955 6G € 339.00	911 954 6G 339.00	706 199 6G 339.00
1760 kg	3000 mm	1500 mm	Ref. 911 944 6G € 299.00	911 943 6G 299.00	706 194 6G 299.00
1770 kg	2500 mm	1500 mm	Ref. 911 932 6G € 295.00	911 931 6G 295.00	706 188 6G 295.00
2010 kg	3500 mm	1250 mm	Ref. 911 953 6G € 319.00	911 952 6G 319.00	706 198 6G 319.00
2030 kg	3000 mm	1250 mm	Ref. 911 942 6G € 285.00	911 940 6G 285.00	706 193 6G 285.00
2050 kg	2500 mm	1250 mm	Ref. 911 930 6G € 275.00	911 929 6G 275.00	706 187 6G 275.00
2380 kg	3500 mm	1000 mm	Ref. 911 951 6G € 299.00	911 949 6G 299.00	706 197 6G 299.00
2410 kg	3000 mm	1000 mm	Ref. 911 939 6G € 285.00	911 938 6G 285.00	706 192 6G 285.00
2430 kg	2500 mm	1000 mm	Ref. 911 928 6G € 259.00	911 927 6G 259.00	706 186 6G 259.00
2910 kg	3500 mm	750 mm	Ref. 911 948 6G € 289.00	911 947 6G 289.00	706 196 6G 289.00
2950 kg	3000 mm	750 mm	Ref. 911 937 6G € 269.00	911 936 6G 269.00	706 190 6G 269.00
2980 kg	2500 mm	750 mm	Ref. 911 926 6G € 219.00	911 924 6G 219.00	706 185 6G 219.00
3740 kg	3500 mm	500 mm	Ref. 911 946 6G € 285.00	911 945 6G 285.00	706 195 6G 285.00
3800 kg	3000 mm	500 mm	Ref. 911 935 6G € 259.00	911 934 6G 259.00	706 189 6G 259.00
3870 kg	2500 mm	500 mm	Ref. 911 923 6G € 215.00	911 922 6G 215.00	706 184 6G 215.00