

9–11 | Non-slip floor tiles

- Suitable for ramps, platforms, bridges, gangways and stairs
- R13 anti-slip protection
- Flame retardant, fire protection class Bfl-S1 in accordance with EN 13501

Width: 800 mm. Height: 5 mm. Material: silicon carbide.
Temperature resistance: -20 °C to +60 °C. Length: 1200 mm.
Weight: 8 kg. Weight: 10 kg/m². Feature: non-slip / chemical resistant / flame retardant / can be driven on. Work area: wet / oily. Surface: closed.

9 | Colour: black.

Ref. 969 503 6G € 185.00

10 | Colour: grey.

Ref. 969 504 6G € 185.00

11 | Colour: yellow.

Ref. 969 505 6G € 185.00



Chemical resistant



Fire retardant



For outdoors



For wheeled traffic



Slip resistant




Chemical resistant



For outdoors



Slip resistant

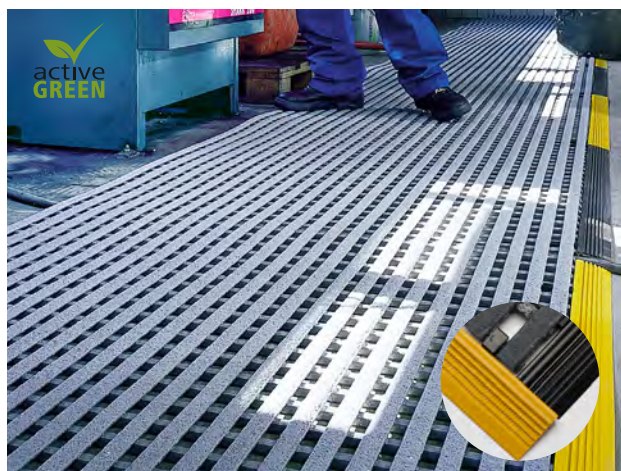

Chemical resistant



For outdoors



Slip resistant



12–19 | Industrial grid matting

- Resistant to hot chippings
- R11/V10 slip protection in accordance with DIN 51130/GUV-R 181
- Resistant to oils, greases, and commonly used chemicals

Height: 18 mm. Material: recycled polyethylene. Temperature resistance: -35 °C to +60 °C. Colour: grey.
Weight: 6 kg/m². Max. load: 1.9 t/dm².
Feature: non-slip / chemical resistant.
Work area: dry / oily. Slat width: 23 mm.
Surface: open. Custom dimensions possible.

Length: 10 m. Max. roll length: 10 m.
Form of delivery: 10 m roll.

18 | Width: 600 mm. Weight: 36 kg.

Ref. 502 651 6G € 619.00

19 | Width: 800 mm. Weight: 48 kg.

Ref. 502 649 6G € 779.00

12 | Width: 1000 mm. Weight: 60 kg.

Ref. 502 648 6G € 959.00

13 | Width: 1200 mm. Weight: 72 kg.

Ref. 516 184 6G € 1375.00

Max. roll length: 30 m.

Form of delivery: cuts per metre.

14 | Width: 600 mm. Weight: 4.2 kg.

Ref. 688 576 6G €/m 72.90

15 | Width: 800 mm. Weight: 5.6 kg.

Ref. 688 584 6G €/m 94.90

16 | Width: 1000 mm. Weight: 7 kg.

Ref. 688 592 6G €/m 135.00

17 | Width: 1200 mm. Weight: 7.2 kg.

Ref. 516 183 6G €/m 149.00

20–27 | Industrial grid matting

- Extremely hardwearing
- R12/V10 slip protection in accordance with DIN 51130/GUV-R 181
- Also suitable for outdoor use

Height: 18 mm. Material: recycled polyethylene. Temperature resistance: -35 °C to +60 °C. Colour: black.
Weight: 6 kg/m². Max. load: 1.9 t/dm².
Feature: non-slip / chemical resistant.
Work area: dry / oily. Slat width: 23 mm.
Surface: open. Custom dimensions possible.

Length: 10 m. Max. roll length: 10 m.
Form of delivery: 10 m roll.

20 | Width: 600 mm. Weight: 36 kg.

Ref. 502 654 6G € 629.00

21 | Width: 800 mm. Weight: 48 kg.

Ref. 502 653 6G € 799.00

22 | Width: 1000 mm. Weight: 60 kg.

Ref. 502 652 6G € 969.00

23 | Width: 1200 mm. Weight: 72 kg.

Ref. 516 186 6G € 1325.00

Max. roll length: 30 m.

Form of delivery: cuts per metre.

24 | Width: 600 mm. Weight: 3.6 kg.

Ref. 916 126 6G €/m 69.90

25 | Width: 800 mm. Weight: 4.8 kg.

Ref. 916 127 6G €/m 92.90

26 | Width: 1000 mm. Weight: 6 kg.

Ref. 916 128 6G €/m 104.90

27 | Width: 1200 mm. Weight: 7.2 kg.

Ref. 516 185 6G €/m 139.00

28 | Type: for long side.

Colour: black / yellow.

Ref. 731 679 6G €/m 25.90

29 | Type: for short side.

Colour: black / yellow.

Ref. 731 678 6G €/m 24.90

30 | Type: for long side. Colour: black.

Ref. 688 665 6G €/m 24.90

31 | Type: for short side. Colour: black.

Ref. 731 677 6G €/m 18.95

Products cut to order may exhibit dimensional tolerances of up to ±5% depending on the material.

Products cut to order are produced specifically for you, and can therefore not be returned.

Free delivery when your order is over €200.

SALES PHONE 1800 677 300 (local rate)

KAISER+KRAFT