

13–17 | Hose reels

- Sturdy steel model for demanding industrial applications
- Reduced hose wear due to PVC rollers on the outlet

Housing material: steel, powder coated.

	13	14	15	16	17
Area of application	for compressed air and water	for compressed air and water	for compressed air and water	for water and oil	for water and oil
Max. pressure up to	20 bar	20	20	138	155
Nominal hose diameter	DN 9	DN 12	DN 12	DN 12	DN 9
External connection	G 3/8	G 1/2	G 1/2	G 1/2	G 3/8
Hose length	20 m	15	20	15	20
Ref.	176 329 6G	176 328 6G	176 330 6G	176 331 6G	176 332 6G
€	265.00	299.00	339.00	329.00	349.00

18–25 | Hose reels


Area of application: for air. Max. pressure up to: 15 bar. Nominal hose diameter: DN 10. External connection: G 3/8 inch.

Housing material: cast aluminium. Attachment option: Can be fastened to wall, ceiling, floor, machines and vehicles.

Mechanism: return spring and locking mechanism.

 **More products online!**

	18	19	20	21	22	23	24	25
Hose length	10 m	10	12	12	15	15	20	20
Length	355 mm	355	355	355	380	380	380	380
Height	325 mm	325	325	325	375	375	375	375
Type	without SCS® duplex brake	with SCS® duplex brake	without SCS® duplex brake	with SCS® duplex brake	without SCS® duplex brake	with SCS® duplex brake	without SCS® duplex brake	with SCS® duplex brake
Ref.	538 725 6G	538 727 6G	233 889 6G	944 128 6G	538 726 6G	538 728 6G	506 193 6G	944 129 6G
€	419.00	599.00	419.00	519.00	529.00	719.00	479.00	599.00
Accessories								
Quick release coupling	Ref. –	233 811 6G	–	–	233 811 6G	–	–	–
€	–	13.95	–	–	13.95	–	–	–
Swivel bracket	Ref. –	233 773 6G	–	–	233 773 6G	–	–	–
€	–	57.90	–	–	57.90	–	–	–

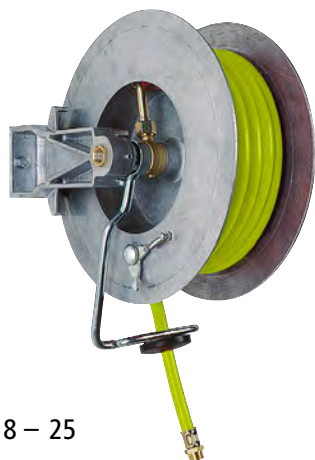

18 – 25



27 + 29



31–33 | Hose reels with controlled retraction

- For air, water, or oil – max. 60 bar

Area of application: for air, water, or oil. Max. pressure up to: 60 bar. Nominal hose diameter: DN 12. External connection: G 1/2 inch. Type: with SCS® duplex brake.

26–30 | Hose reels

- Sturdy, durable steel design
- Optionally available with automatic roll up for controlled, braked retraction

Area of application: for air, water, or oil. Max. pressure up to: 60 bar. Nominal hose diameter: DN 12. External connection: G 1/2 inch. Housing material: painted, partially galvanised. Attachment option: Can be fastened to wall, ceiling, floor, machines and vehicles. Mechanism: return spring and locking mechanism. Type: without SCS® duplex brake.



Video
Online!

SCS® duplex brake.

The SCS® duplex brake guarantees controlled, braked retraction without risk for people and machines. Only functional in direction of retraction.

	26	27	28	29	30
Hose length	10 m	10	15	15	20
Ref.	265 098 6G	506 188 6G	265 128 6G	506 189 6G	265 144 6G
€	489.00	639.00	689.00	779.00	699.00
Accessories					
Swivel bracket	Ref. 265 233 6G	607 726 6G	265 233 6G	607 726 6G	265 233 6G
€	149.00	92.90	149.00	92.90	149.00

	31	32	33
Hose length	10 m	15	20
Ref.	944 131 6G	944 133 6G	944 135 6G
€	759.00	949.00	979.00
Accessories			
Swivel bracket	Ref. 265 233 6G	265 233 6G	265 233 6G
€	149.00	149.00	149.00

Free delivery when your order is over €200.

SALES PHONE 1800 677 300 (local rate)

KAISER+KRAFT