

Industrial stairways

To suit your individual requirements


Angle of inclination 45°. Steps rigidly attached to right-angle rails. Rails made of extruded aluminium profiles. Two support brackets on the upper end, non-slip plastic feet at the bottom.

Not for domestic use according to DIN 18065.

Supplied complete with one hand rail, attaches to left or right side.

Second hand rail as an accessory.

Intermediate sizes and special designs available on request.

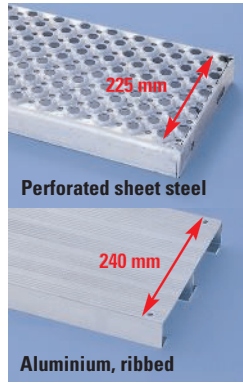

Number of steps		4	6	8	10	12	14	16
Vertical height	mm	830	1250	1670	2080	2500	2910	3330
Reach	mm	960	1380	1800	2220	2640	3050	3470
Material of steps	Step width							
aluminium, ribbed	600 mm	Ref. 985 278-2G € 729,-	985 280-2G € 949,-	985 281-2G € 1.175,-	985 282-2G € 1.345,-	985 283-2G € 1.675,-	985 284-2G € 1.925,-	985 285-2G € 2.290,-
	800 mm	Ref. 985 286-2G € 789,-	985 288-2G € 1.025,-	985 289-2G € 1.295,-	985 290-2G € 1.575,-	985 291-2G € 1.825,-	985 292-2G € 2.150,-	985 293-2G € 2.550,-
sheet steel, perforated	600 mm	Ref. 746 155-2G € 759,-	746 156-2G € 969,-	746 157-2G € 1.195,-	746 158-2G € 1.395,-	746 159-2G € 1.725,-	746 160-2G € 1.975,-	746 161-2G € 2.350,-
	800 mm	Ref. 746 162-2G € 819,-	746 163-2G € 1.045,-	746 164-2G € 1.345,-	746 165-2G € 1.825,-	746 166-2G € 1.895,-	746 167-2G € 2.250,-	746 168-2G € 2.650,-
Accessories								
Second railing		Ref. 746 186-2G € 165,-	746 187-2G € 179,-	746 188-2G € 199,-	746 189-2G € 209,-	746 190-2G € 235,-	746 191-2G € 245,-	746 192-2G € 259,-

Mobile safety steps

Practical for mobile use


- Angle of inclination 60°
- Rails made of sturdy aluminium profiles
- Non-slip steps made of ribbed aluminium

Top ends of rails closed and bolted to the sides of the platform. Steps rigidly connected. Step width x depth 800 x 200 mm. Platform length 600 mm.

Hand rail on both sides and 3-sided platform railing, 1100 mm high, with knee and foot rails.

2 swivel castors on step rails, wheel Ø 125 mm, 2 fixed castors on the cross strut of the support side, wheel Ø 160 mm, all with wheel stops.

Delivered partially assembled – easy final assembly.

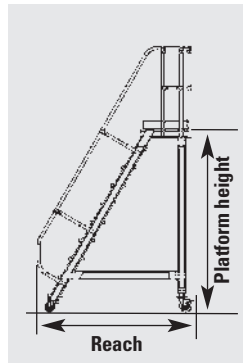

Steps incl. platform	pcs.	5	7	9	11	13	15
Platform height	mm	1210	1690	2180	2660	3150	3640
Reach	mm	1360	1630	1920	2170	2460	2740
Overall width	mm	1000	1000	1400	1400	1400	1800
Ref.		944 248-2G	944 249-2G	944 250-2G	944 251-2G	944 252-2G	944 269-2G
€		2.690,-	3.090,-	3.550,-	3.950,-	4.390,-	4.890,-

Crossover platforms

For bridging machines, conveyor belts or pits

- Angle of inclination 60°
- Overall max. load 300 kg
- Safe, fatigue-free working – even over longer periods
- Two platform sizes to choose from

Lower end of steps with foot brackets for ground stability.

Otherwise constructed as industrial steps and mobile safety steps above.

One hand rail included, can be mounted on left or right.

Second hand rail as an accessory.

Delivered partially assembled – easy final assembly.



Additional sizes, mobile version, 45° angle of inclination as well as alternative designs available on request.

Number of steps		5		7		9	
Platform length x width	mm	800 x 600	1200 x 600	800 x 600	1200 x 600	800 x 600	1200 x 600
Clear height	mm	1174	1174	1658	1658	2142	2142
Reach	mm	2160	2560	2720	3120	3280	3680
Ref.		944 253-2G	944 255-2G	944 256-2G	944 257-2G	944 271-2G	944 272-2G
€		1.725,-	1.925,-	2.150,-	2.450,-	2.790,-	3.090,-
Accessories							
Second railing		Ref. 944 258-2G € 359,-	944 259-2G € 359,-	944 260-2G € 359,-	944 261-2G € 359,-	944 273-2G € 399,-	944 274-2G € 399,-



YELLOW = 7 working days

FREE DELIVERY
SALES FAX: 1 800 677 301 (local rate)

KAISER + KRAFT
EVERYTHING FOR THE BUSINESS.

WORKSHOP