



Pneumatic tyres



Punctureproof polyurethane tyres



Plate dollies

Max. load 250 kg

The transported goods are secured by their own weight. Cushioned clamping jaws.

With rigid axle – wheels run straight. Wheel Ø 260 mm.

Powder coated, light blue RAL 5012.

Wheel type	pneumatic tyres		polyurethane, punctureproof	
	15 – 70	60 – 110	15 – 70	60 – 110
Plate holder	mm			
Length x width x height	mm	300 x 355 x 340	300 x 355 x 340	310 x 310 x 305
Ref.		927 423-2G	114 412-2G	512 518-2G
€		129,-	129,-	199,-



With tubular steel frame (accessory)

Overall height	mm	875	875
Loading height	mm	275	275
Platform length x width	mm	1000 x 700	1200 x 800
Ref.		942 465-2G	942 466-2G
€		429,-	449,-
Accessories			
Tubular bars	Ref.	942 467-2G	942 468-2G
	€ / each	52,90	54,90

Plate trucks

Max. load 500 kg

- Securely support and transport all types of plates and panels
- Frame with high quality zinc plating for a long life cycle
- Platform with weatherproof coating

Sturdy welded angle iron construction, 40 x 40 mm. Platform made of 9 mm thick wooden panel with weatherproof coating.

Three tubular bars, each 600 mm high. Additional bars as an accessory, trucks hold up to seven.

Wheels

2 swivel castors and 2 fixed castors, wheel Ø 200 mm, solid rubber tyres. Swivel castors with double stops.

Plate trucks


Max. load 300 kg

Powder coated as standard in light blue RAL 5012. Contact surface with textured rubber covering.

With solid rubber tyres, wheel Ø 200 mm or pneumatic tyres, wheel Ø 260 mm, roller bearings.


Push handle enclosed with delivery – easy self-assembly.

2 With adjustable plate holder, lockable with star grip screw.

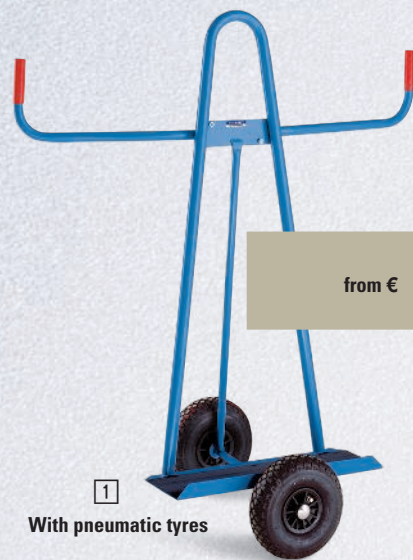

With pneumatic tyres

EUROKRAFT
★★★★★

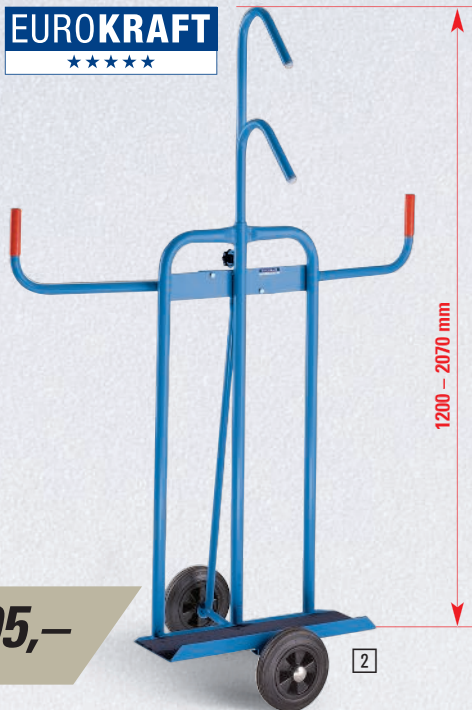

from € **195,-**

1200 – 2070 mm

Model		1	2
Length x width	mm	1250 x 600	1250 x 600
Load surface	mm	600 x 200	600 x 200
solid rubber tyres	Ref.	911 195-2G	911 197-2G
	€	195,-	275,-
pneumatic tyres	Ref.	911 196-2G	
	€	195,-	



QUIPO
★★★

Plate trucks

Three permanently welded tubular supports: centre support 900 mm high, outside supports 600 mm. Clearance between supports 340 mm.

Powder coated in melon yellow RAL 1028. Platform made of moulded chipboard with black, polyurethane coated finish.

2 swivel castors and 2 fixed castors, wheel Ø 160 mm, solid rubber tyres. 1 swivel castor with double stop.

Max. load	kg	350
Platform length x width	mm	1250 x 800
Loading height	mm	235
Length x width x height	mm	1310 x 800 x 1140
Ref.		942 481-2G
€		285,-