
## 040 Slabmat Carré™



- Indestructible rubber mat that absorbs shock of fallen materials and protects floors and equipment.
- Textured top surface provides traction.
- Recommended for storage of heavy industrial equipment such as mold tools, engine blocks, but also weight rooms, skating rinks, golf courses, trailers and stables.
- These interlocking mats allow on-site customization.
- Units of 91 x 91 cm can be easily laid out from wall to wall or as islands, in any shape or direction.
- Bevelling solutions; allow out and inside corners.

## 040 Slabmat Carré™

	PF	RODUCT SPECIFICATIONS	
Designation	Industrial matting		
Туре	Shock Absorbing		
Description	Modular system, Textured top surface which provides traction		
Material	100% natural rubber		
Process	Compression moulding		
Category	Best		
Recommended use	Heavy duty - dry industrial enviroments		
Colours	Black		
Weight	14.6 kg/m <sup>2</sup>		
Thickness	13 mm		
Standard sizes	91 cm x 91 cm		
Custom sizes	N/A		
Special remarks	Male and female attacha	ble ramps in 10 cm x 91 cm, Black	
PRODUCT TESTING			
	Tests	Norms	Results
Compression deflection		U.S.	
	@ 25%	ASTM D575	33.3 lb/in <sup>2</sup>
	@ 50%	ASTM D575	33.3 lb/in <sup>2</sup>
Foam battery		ASTM D3574	
Abrasion resistance		ASTM D3884-01	
	500 Cycles		
	5000 Cycles		2.90 gr weight loss
Static coefficient of friction		ASTM C1028-96	0.68
Elongation		ASTM D412	165.7%
Breaking load		ASTM D412	44 lb
Graves tear strength		ASTM D 1004	55.4 lb
Hardness		ASTM D2240-02	67 Shore A
Anti-slip		DIN 51130 and BG-RULE BGR181	R9
		FIRE TESTING	
	Critical radiant flux	ASTM E-648	
	Fire retardancy	DIN4102	
		EN 13501-1	
	Flammability test	ASTM D2859	Pass
ESD		ANSI ESD S7.1 50% Humidity	
Sustainability		Recyclable material Reach Compliant (Registration, Evaluation, Authorization and Restriction of Chemicals)	

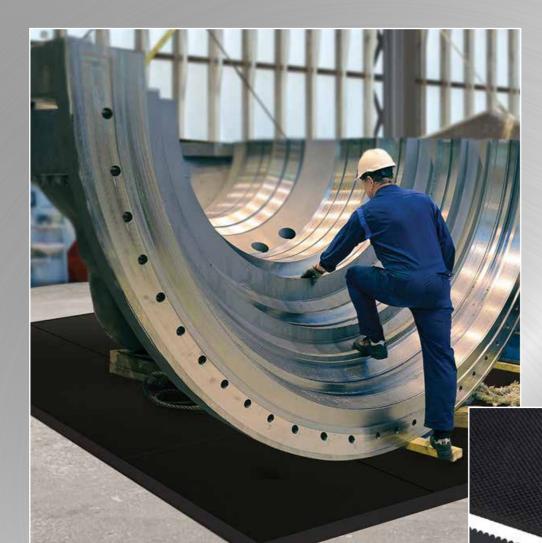